





**BETRIEBSANLEITUNG FÜR
BALKENLEUCHTE**
RUGGY PIR Sensor

**MODE D'EMPLOI POUR
LAMPE FAISCEAU**
RUGGY PIR Sensor

**ISTRUZIONI DI FUNZIONAMENTO PER
LAMPADA FASCIO**
RUGGY PIR Sensor

**OPERATING MANUAL FOR
BATTEN LIGHT**
RUGGY PIR Sensor

185-042-000

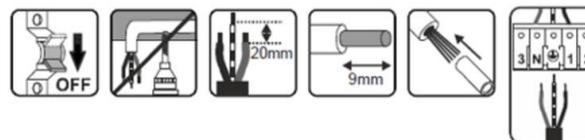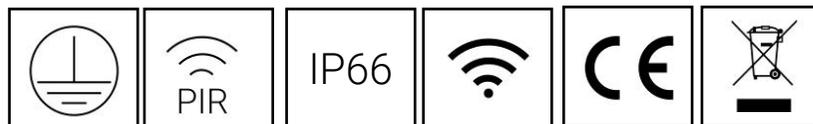

DE Die Montage und Inbetriebnahme darf nur von autorisiertem Fachpersonal durchgeführt werden (Elektroinstallateur). Die Leuchte dient ausschliesslich der Not-Beleuchtung und ist entsprechend den Errichtungsbestimmungen zu installieren. Eine andere Nutzung oder ein anderer Einbau gilt als nicht „bestimmungsgemäss“.

Achtung! Während der Verdrahtung und Installation der Leuchten und Versorgungsgeräte immer spannungslos arbeiten. Nichtbeachten kann zur Zerstörung der LED-Module führen. **Bei Defekt zurück an Hersteller.** Die Montageanleitung muss aufbewahrt werden. Technische Änderungen vorbehalten.

FR Le montage et la mise en service ne peuvent être effectués que par du personnel spécialisé autorisé (installateur électrique). Le luminaire sert uniquement à éclairer de secours et doit être installé conformément aux dispositions d'édification. Une autre utilisation ou intégration est considérée comme «non conforme aux dispositions».

Attention! Toujours travailler hors tension lors du câblage et de l'installation des luminaires et unités d'alimentation. Le non-respect de cette consigne peut entraîner la destruction des modules à LED. **Retourner au fabricant en cas de défaut.** L'instruction de montage doit être conservée. Sous réserve de modifications.

IT Montaggio e messa in funzione possono essere effettuati solo da personale specializzato autorizzato (elettoinstallatori). Il proiettore serve esclusivamente a scopo di illuminazione de emergenza e deve essere installato secondo le disposizioni di montaggio. Un altro utilizzo o un'altra modalità di incasso sono considerati "non conformi".

Attenzione! Lavorare sempre in assenza di tensione mentre si cablano e si installano gli apparecchi e le unità di alimentazione. In caso contrario i moduli LED possono andare distrutti! **In caso di guasto rispedire il proiettore al produttore.** Le istruzioni di montaggio devono essere conservate. I dati tecnici possono subire modifiche senza preavviso.

EN Installation and commissioning may only be carried out by authorised technical personnel (electrical fitters). The luminaire is designed solely for emergency lighting and is to be installed according to the installation instructions. Any other use or any other installation is considered to be improper.

Caution! Make sure that the luminaires and power supply units are always disconnected from the main supply during wiring and installation work. Otherwise, the LED modules may be destroyed. **Return to manufacturer if defects are found.** Assembly instructions must be kept. Subject to technical change without notice.

Technische Änderungen vorbehalten / Les détails techniques sont sujet à des changements.
Modifiche tecniche riservate / Technical Details are subject to change.
Seite 1/2, 09.12.2025 © unex lighting AG, Flüelastrasse 12, 8048 Zürich

DE Bedienelemente

FR Éléments de commande

IT Elementi di controllo

EN Controls



185-042-000


PIR Sensor datasheet

Operating Voltage	DC12-24V
Power consumption	0.5W±0.2W
Microwave frequency	-
Transmission power	<0.5mW
Detection angle	90°
Detection Area	1-8M 100%/75%/50%/20% are adjustable by remote
Hold time	10s/1min/5min/10min/15min/20min/30min/60min are adjustable by remote
Daylight sensor	10Lux/30Lux/50Lux/Disable are adjustable by remote
Stand-by DIM Level	0%/10%/30%/50% are adjustable by remote
Stand-by Period	1min/30min/60min/+∞ are adjustable by remote
Dimming Range	70%/80%/90%/100% are adjustable by remote
Microw ave ON/OFF function	Press the ON/OFF button, the light goes to permanent on or permanent off mode, and the sensor is disabled and must press AUTO button to quit this mode for Setting. Press AUTO button, the sensor starts to function and all settings remain the same as the latest status before the light is switched on/off.
Installation Height	Max installation height is 10-12meters. Recommended Installation Height: Ceiling mounted height 2.5-8m.
Minimum mounting distance	Recommended mounting distance should be more than 3m
Operating temperature(°C)	0°C ~25°C

Factory setting

Factory setting				
Detection Area	Hold time	Daylight sensor	Stand-by DIM level	Stand-by Period
100%	5min	Off	0%	0min

Induction Range

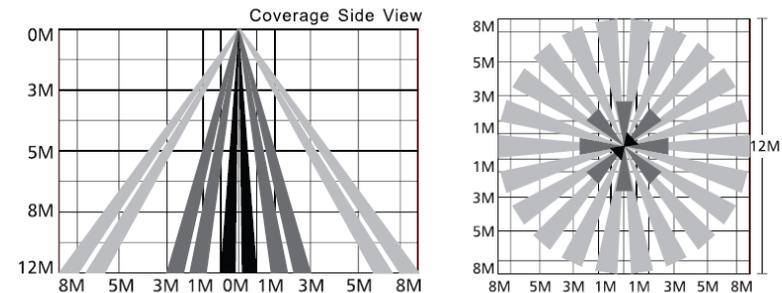

Notice 1:

The distance test is carried out under Ta25°C, 12 meters surface mounting installation height. The test result is based on the movement along the tangential direction of the sensor, and the detect distance can be adjusted by the dial switch.

Notice 2:

Infrared sensor will be affected by temperature. Too high or too low temperature may affect the detect distance or even cause failure to sensor.

Technische Änderungen vorbehalten / Les détails techniques sont sujet à des changements.
Modifiche tecniche riservate / Technical Details are subject to change.
Seite 2/2, 09.12.2025 © unex lighting AG, Flüelastrasse 12, 8048 Zürich