




plaster kit
90017119 (optional)

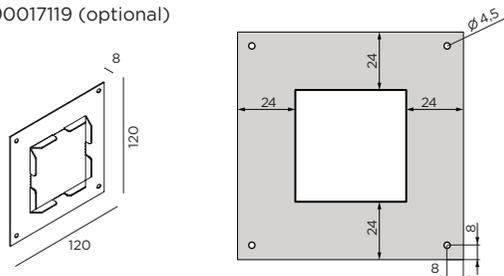

recessed housing
90012027 (optional)
Always use in combination with plaster kit.

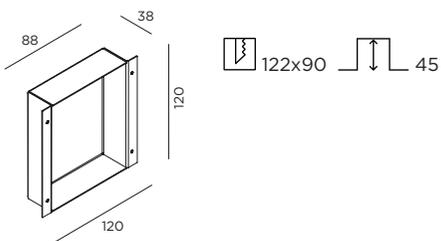


Recessed housing + plaster kit
122x90

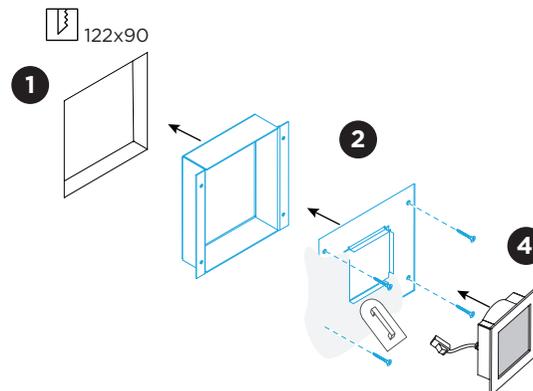

Driver must be powered off before connecting the cables.

Before connecting the luminaire/LED module to the driver please make sure the driver is not powered but disconnected from the mains. The driver can only be powered when the luminaire/LED module is already connected. Disregarding this instruction might damage or even destroy the luminaire/LED module.




DIMENSIONS




MOUNTING INSTRUCTION

- 1 Make a hole in the wall according to the prescribed dimensions of the fixture or the recessed housing.
- 2 When using a (recessed housing +) plaster kit: Insert the recessed housing into the wall and fix the plaster kit with screws on it (screws are included.). Plaster into the wall.
- 3 **POWER CONNECTION**
Connect to 100-240V.
Always use a driver according to the specifications of the LED module.

Single Connection




Multiple Connection




- 4 Insert the fixture in the hole or plasterkit.

1.0 LITO

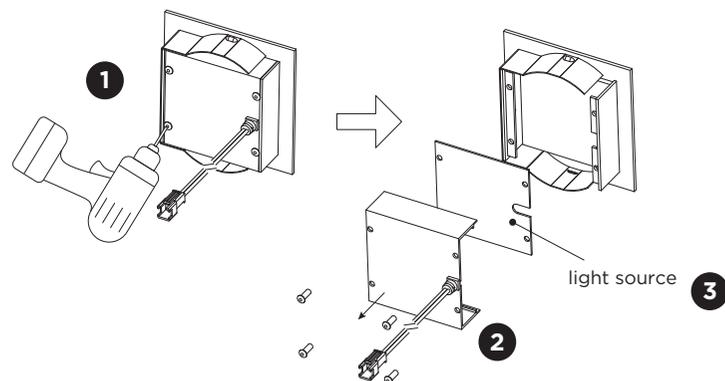


2.0 LITO

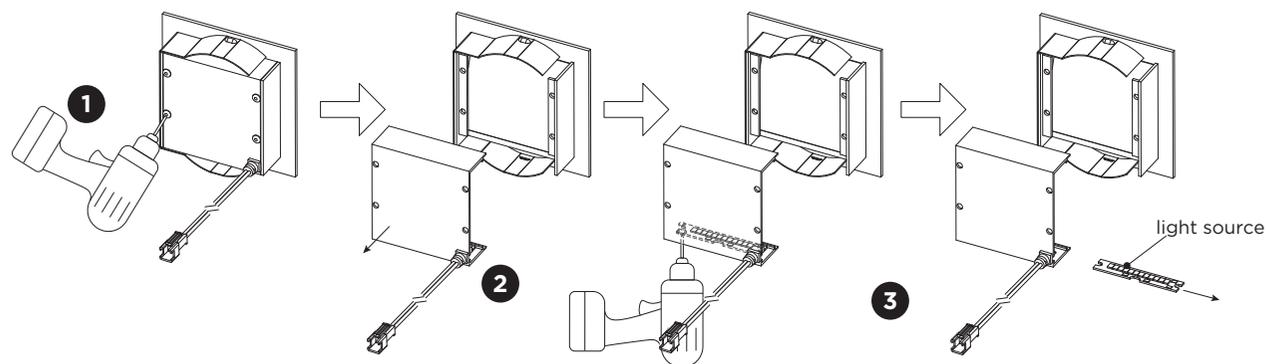

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1 Drill out the rivets on the back cover using any available tools.
- 2 Remove the back cover.
- 3 For 1.0: Disconnect the wires and take out the light source.
For 2.0: Drill out the rivets, disconnect the wires and take out the light source.



The light source is not replaceable.



This luminaire contains a light source with the energy class E.

