



ISIS S2 PM-M

LED-5L06E450ZS11/PM2M/L100 NL 3K#


WWW.OSMONT.CZ

ISIS S2 PM-M

Product code: ISI70301

Type: LED-5L06E450ZS11/PM2M/L100 NL 3K#

Short description of the luminaire: Stainless steel polished | pendant LED light ON/OFF | matt PMMA shade | cable pendant (with inner support wire) 100 cm |



Technical data



Types of luminaires	Classic on/off
Mounting type	Suspended - cable
Base material	stainless steel steel
Shade material	opal polymethyl methacrylate
Base color	polished stainless steel
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	300 mm
Length	300 mm
Height	300 mm
Diameter	ø 300 mm
Suspension length	1000 mm
mounting holes (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from -20°C to +30°C

Electrical data

Power consumption	20 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	2960 lm
Lum. flux of light source	3360 lm
Luminaire efficacy	148 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

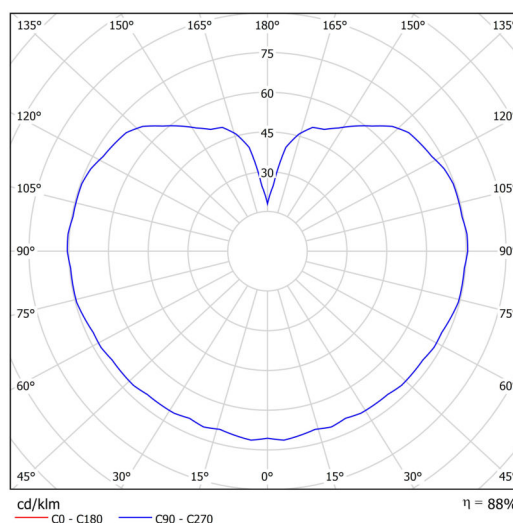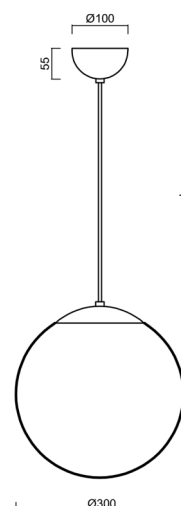

Eulum data for calculation programs are available at www.osmont.cz.

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

TECHNICAL SHEET



Logistical data

EAN	8591728041236
Weight NTTO	1.96 Kg
Weight BTTO	2.4 Kg
Number of cartons	2 pcs
Package volume	0.042 m ³
Package 1 width	0.31 m
Package 1 length	0.31 m
Package 1 height	0.31 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20600	PM2M (300mm)	white		