



DIMENSIONS



MOUNTING INSTRUCTION

- 1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the wall with screws (screws are not included).


- 2 **POWER CONNECTION**
Connect to 220-240V.



Connect the earth cable.



Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

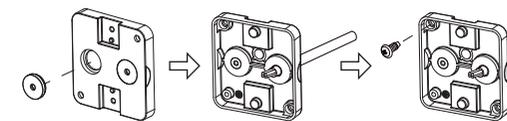


Push the grommet into the back plate.

Pull the cable through the back plate.

Mount the back plate on the wall.

- 3 Fix the luminaire on the base with the socket screws.


Mounting base:




Always use a matching grommet in the overview table.

	A	B	C
<p>use pin to make hole, not a knife</p>			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²

1

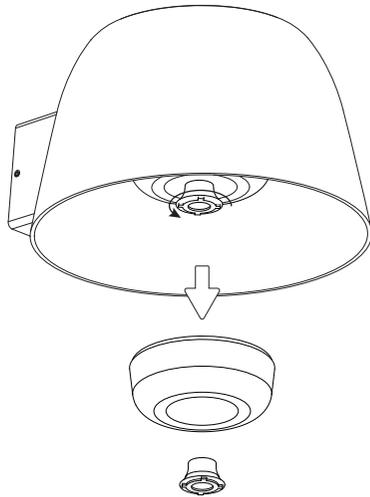


2

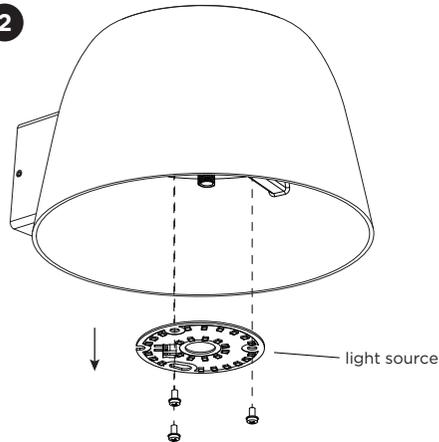

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1 Unscrew the nut and take out the opal cover.
- 2 Take out all parts, disconnect the wires and unscrew the light source to remove the light source.



The light source is replaceable by an authorized professional. For advice contact your Wever & Ducré customer service contact point.



This luminaire contains a light source with the energy class G.

