



ISIS S3 PM-M

LED-5L06E600ZS11/PM3M/L100 MS 3K#


WWW.OSMONT.CZ

ISIS S3 PM-M

Product code: ISI70311

Type: LED-5L06E600ZS11/PM3M/L100 MS 3K#

Short description of the luminaire: Brass polished | pendant
LED light ON/OFF | matt PMMA shade| cable pendant (with inner
support wire) 100 cm |



Technical data

Types of luminaires	Classic on/off
Mounting type	Suspended - cable
Base material	brass
Shade material	opal polymethyl methacrylate
Base color	polished brass
Shade color	white
Holding the shade	steel holder
Mounting location	ceiling
Width	400 mm
Length	400 mm
Height	400 mm
Diameter	ø 400 mm
Suspension length	1000 mm
mounting holes (diameter)	none
Energy Class	D
Impact strength	IK06
Operating temperature	from -20°C to +30°C

Electrical data



Power consumption	27 W
Ingress Protection	IP40
Socket	LED modul
terminal block	none
Automatic circuit breaker type B10A	31 pcs
Automatic circuit breaker type B16A	50 pcs
Automatic circuit breaker type C10A	52 pcs
Automatic circuit breaker type C16A	85 pcs
Number of LED drivers	1

Luminous data

Lum. flux of luminaire	3910 lm
Lum. flux of light source	4440 lm
Luminaire efficacy	144 lm/W
Chromaticity temperature	3000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

Eulum data for calculation programs are available at
www.osmont.cz.

OSMONT, s.r.o.
HYBRÁLEC 129,
586 01 JIHLAVA, CZ

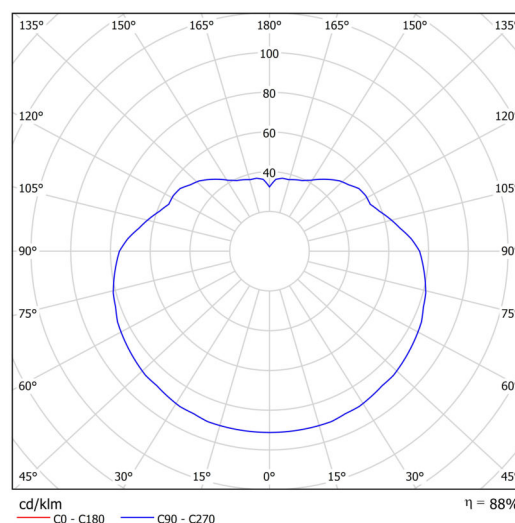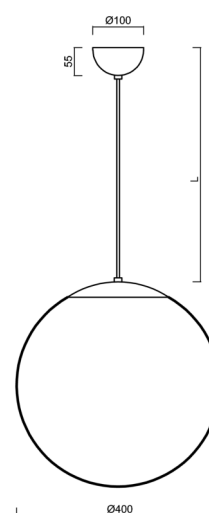

TECHNICAL SHEET



Logistical data

EAN	8591728041335
Weight NTTO	3.51 Kg
Weight BTTO	4.2 Kg
Number of cartons	2 pcs
Package volume	0.084 m ³
Package 1 width	0.41 m
Package 1 length	0.41 m
Package 1 height	0.41 m
Warranty*	60 months

**The warranty for the batteries is valid for 36 months from the date of purchase.*

Additional assortment:

Lampshade

Product code	Name	Color	Picture	Drawing
20602	PM3M (400mm)	white		