

790D




Ref.	790D
Colección / Collection / Collection	Indoor. PRO
Descripción / Description / Description	Empotrable Ambiente Recessed Ambience Encastré d'Ambience

Características Luminaria / Light Data Sheet / Caractéristiques de la Luminaire

Material / Material / Matériau	Aluminio / Aluminium / Aluminium
Colores / Colours / Couleurs	0101 Negro / Black / Noir 0119 Negro-Oro Satinado / Black-Brus. Gold / Noir-Or Satiné 9019 Blanco Técnico-Oro Satinado / Technical White-Brus. Gold / Blanc Technique-Or Satiné 9090 Blanco Técnico / Technical White / Blanc Technique
IP	20
Clase	 230Vac  GU-10
	 12Vdc  GX5.3
Driver Ext. / Ext. Driver / Alimentateur Ext	No incluido / Not included / Non-inclus
Portalámparas / Lamp holders / Porte-ampoules	No incluido / Not included / Non-inclus
Peso / Weight / Poids	0,08 Kg
Cantidad / Pieces / Quantité	1/50

Bombillas LED / LED Lamp / Ampoule LED

Ref. HLX08 (8W)	2700K - 828Lm 3000K - 849Lm 4000K - 891Lm
Ref. HLX12 (12W)	2700K - 1207Lm 3000K - 1238Lm 4000K - 1300Lm
HLP06 (6W - CCT)	3000K - 432Lm 4000K - 467Lm
1LHG-300 (5W - CCT)	3000K - 452Lm 4000K - 478Lm

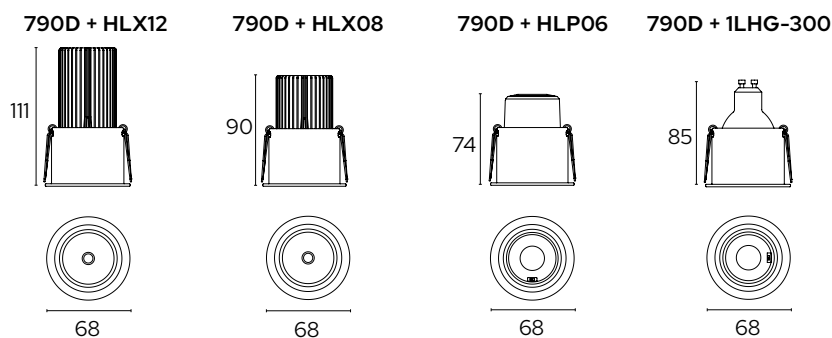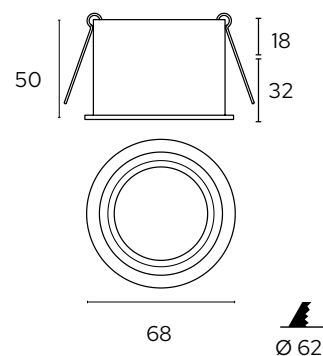

Colores / Colours / Couleurs



90 Blanco Técnico / Technical White
/ Blanc Technique



9019 Blanco Tec.-Oro Satinado /
Tec. White-Brus. Gold /
Blanc Technique-Or Satiné



0119 Negro-Oro Satinado /
Black-Brus. Gold / Noir-Or Satiné



0101 Negro / Black / Noir

Accesorios / Accessories / Accessoires



JISO Smart Control



HC70790



HC70701



1DH3



1DH1



1DH0



1PHB - GU10-GZ10



1PHG - GU10 100-240V

Compatible lighting with installations that require $UGR < 19$
Compatible con instalaciones que requieren $UGR < 19$
Compatible avec les installations nécessitant $UGR < 19$

Documentos / Documents / Des documents

[Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE](#)

[Instrucciones de Instalación / Installation Instructions / Instructions d'Installation](#)