

# LIMA

## SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	8,5W
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	1360
LIGHT COLOUR	[K]	2700 / 3000 CCT-switch
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	L80/B50.000
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		YES
THROUGH-WIRING		NO

MATERIAL		ALUMINUM / UV-resistant PVC
INGRESS PROTECTION		diffusor
PROTECTION CLASS		IP54
NET WEIGHT	[kg]	0,88
GROSS WEIGHT	[kg]	1,04
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005




## LIGHT DISTRIBUTION

n/a

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES

Colours:




white




black

## MOUNTING DIMENSIONS

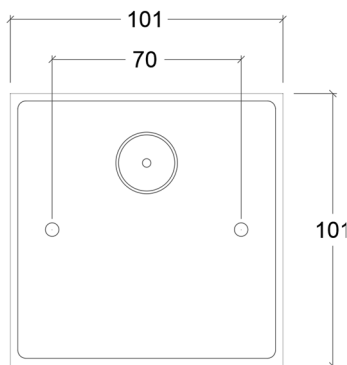

## FIXTURE DIMENSIONS

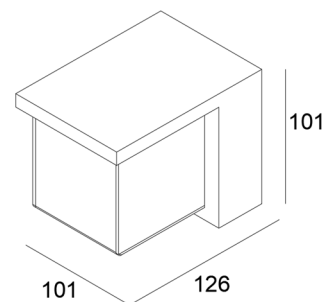

CRI>90



IP54

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING