



PLUG & PLAY connection



to STRAIGHT CONNECTOR:




to T-CONNECTOR:

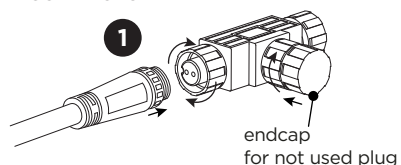

Do not cut off the connector.
This will cancel the warranty.

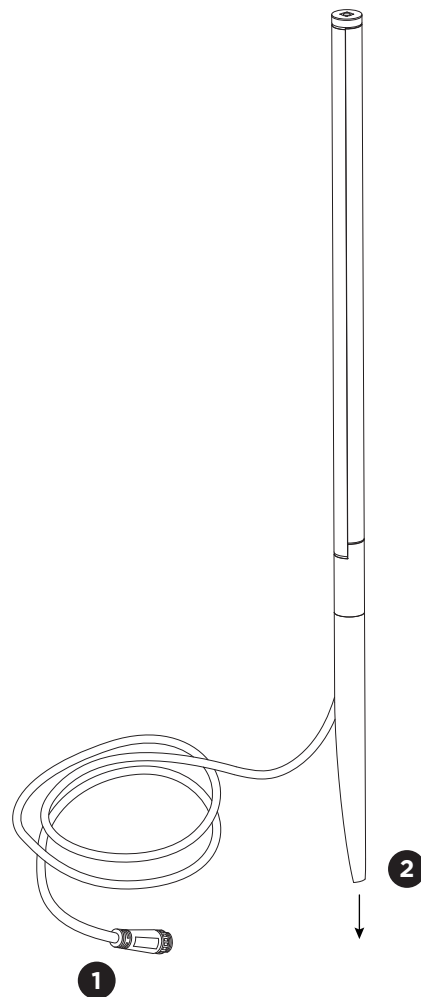

DIMENSIONS




MOUNTING INSTRUCTION

- 1 POWER CONNECTION**
Connect to plug & play driver with a straight connector or T-connector.
For detailed information to the plug & play system see next page.
- 2 Put the fixture in the soil.**





Place the cables deep enough in the ground or protect them with a cover/tube to avoid damage due to a shovel.

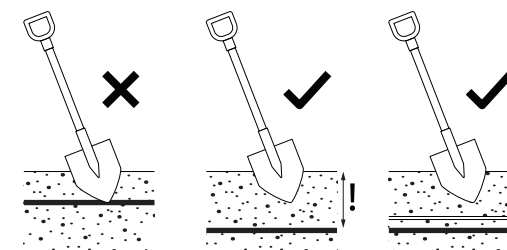

PLUG & PLAY SYSTEM

luminaire power	max. cable length in relation to distance to first luminaire								
	≤5,0m	≤7,5m	≤10,0m	≤15m	≤20,0m	≤30,0m	≤40,0m	≤50,0m	
5W	50m	50m	50m	50m	50m	50m	50m	50m	max. cable length
10W	50m	50m	50m	50m	50m	50m	50m	50m	
15W	50m	50m	50m	50m	50m	50m	50m	44m	
20W	50m	50m	50m	50m	50m	50m	26m	-	
25W	50m	50m	50m	50m	50m	26m	-	-	
30W	50m	50m	50m	50m	36m	6m	-	-	
35W	50m	50m	50m	38m	22m	-	-	-	
40W	50m	50m	42m	28m	12m	-	-	-	
45W	50m	42m	34m	20m	4m	-	-	-	
50W	42m	36m	28m	12m	-	-	-	-	
55W	38m	30m	22m	8m	-	-	-	-	
60W	32m	26m	18m	2m	-	-	-	-	
65W	30m	22m	14m	-	-	-	-	-	
70W	26m	18m	10m	-	-	-	-	-	
75W	24m	16m	8m	-	-	-	-	-	

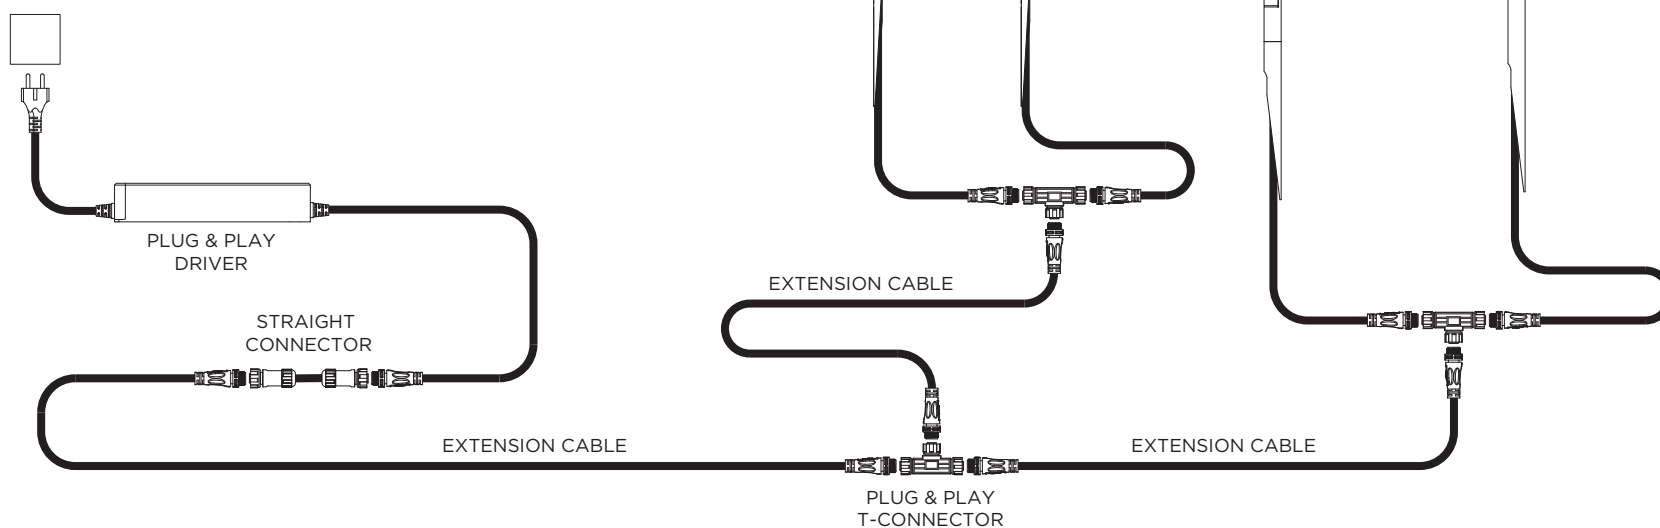


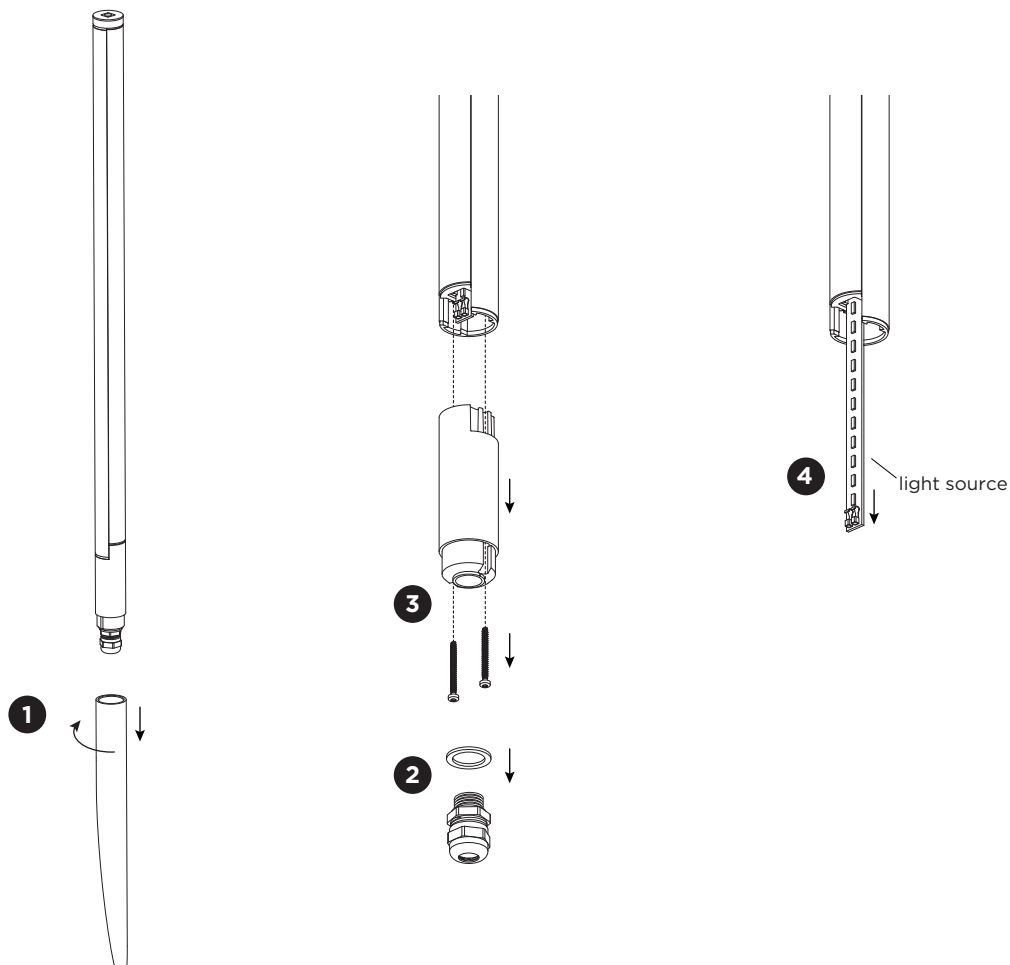

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1** Remove the spike by unscrewing it.
- 2** Unscrew the cable gland and remove the washer.
- 3** Remove the cover by unscrewing the screws.
- 4** Disconnect the wires and remove the light source by pulling it out.



The light source is replaceable by Wever & Ducreé or by a professional with explicit authorisation. For more information please contact your local Wever & Ducreé customer service point.



This luminaire contains a light source with the energy class F.