


# TRAM

INSTALLATION INSTRUCTIONS | JANUARY 2023



## DIMENSIONS

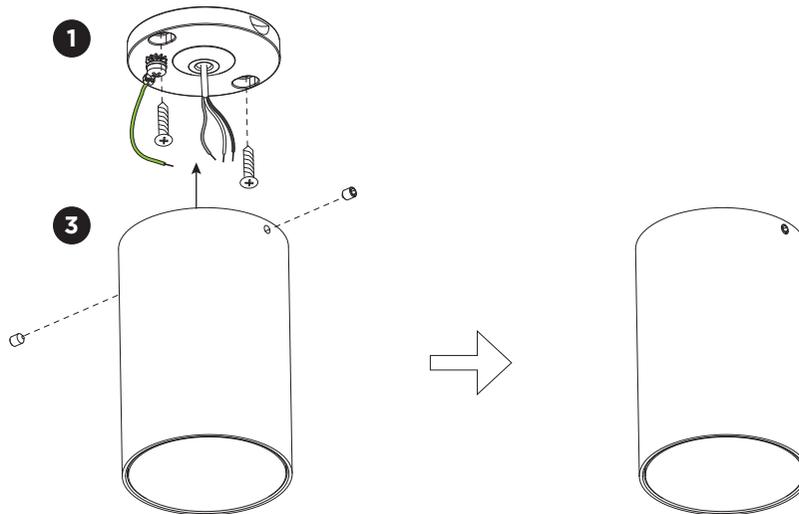


1,0 ROUND

## MOUNTING INSTRUCTION

- 1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the ceiling with screws (screws and plugs (if necessary) are included).

- 2 POWER CONNECTION  
Connect to 220-240V.

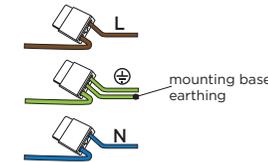


Connect the earth cable.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.


for example:

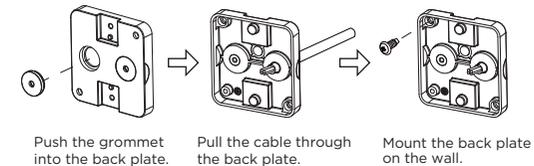

- 3 Fix the luminaire on the base with the socket screws.

**Caution!**  
Because of the minimalistic design of this luminaire, space inside the luminaire for wiring through is very limited and not recommended.

Mounting base:

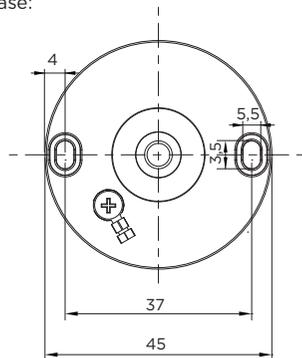


grommets:

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm <sup>2</sup> 2or3x 1.0mm <sup>2</sup> 2or3x 1.5mm <sup>2</sup>	2or3x 0.75mm <sup>2</sup> 2x 1.0mm <sup>2</sup>	0.75mm <sup>2</sup> 1.5mm <sup>2</sup>

# TRAM


INSTALLATION INSTRUCTIONS | JANUARY 2023

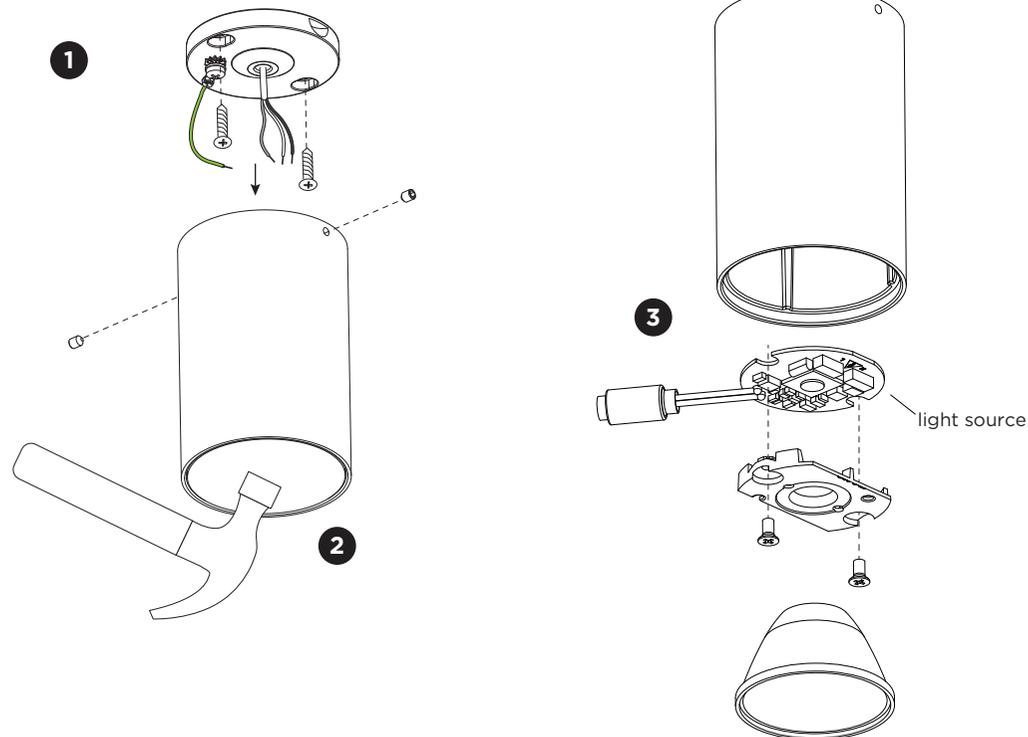

## DISMOUNTING AND RECYCLING INSTRUCTIONS

### Light source

- 1** Loosen the socket screws, disconnect the wires and remove the fixture from the mounting base.
- 2** Break the glass.
- 3** Take out the reflector and unscrew the holder to remove the light source.



The light source is not replaceable.



This luminaire contains a light source with the energy class F.