



TUBE CARRÉ 2.0

INSTALLATION INSTRUCTIONS | JUNE 2024

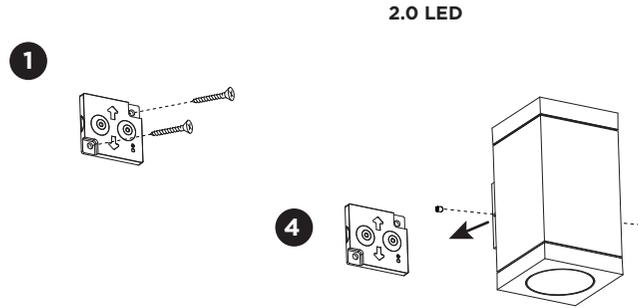


backplate:

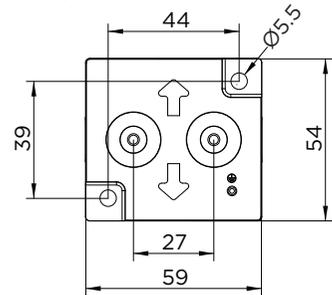


Always use a matching grommet in the overview table.

	A	B	C
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²


2.0 LED

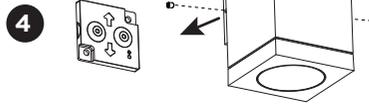

2.0 PAR16

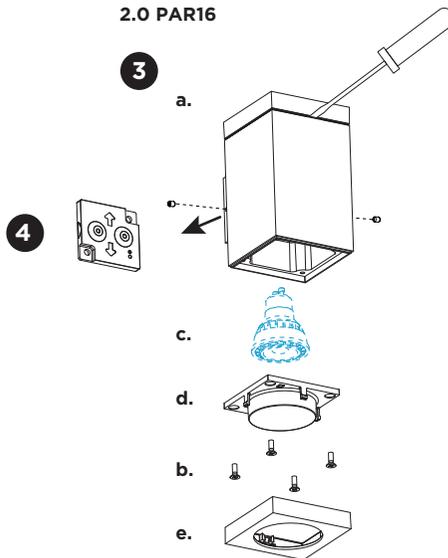

DIMENSIONS

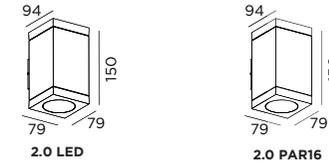

MOUNTING INSTRUCTION

1 Remove the backplate by loosening the socket screws and fix it to the wall with screws (screws are not included).


2 POWER CONNECTION

Connect to 220-240V.

Connect the earth cable.



Always use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.

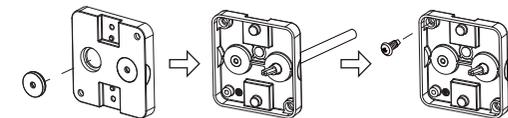

Push the grommet into the back plate.

Pull the cable through the back plate.

Mount the back plate on the wall.

3 For PAR16 version:



- Open the cover with a flat screwdriver.
- Loosen the four screws of the glass cover and remove it.
- Insert the lamp.
- Put back the glass cover with the four screws.
- Place back the body cover by pushing.

4 Mount the luminaire on the backplate with the socket screws.

PB19-010-549-00_v3

TUBE CARRÉ 2.0


INSTALLATION INSTRUCTIONS | JUNE 2024

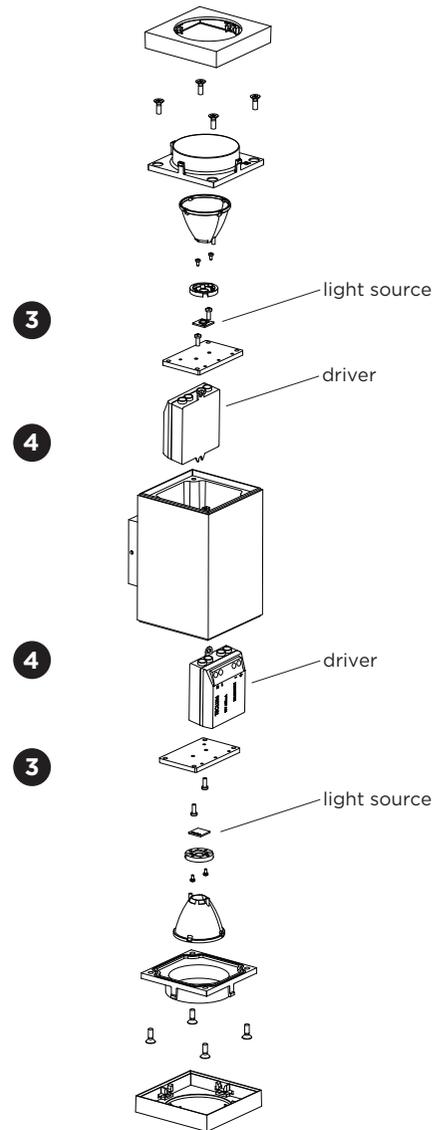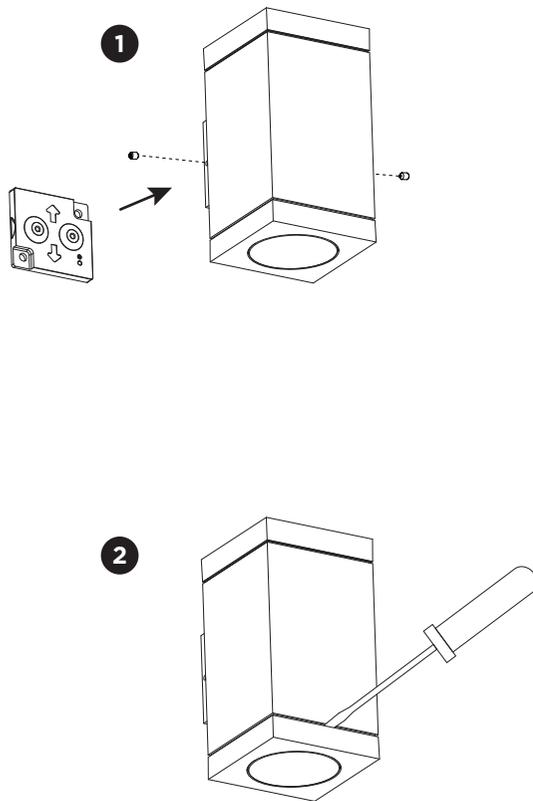


DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source & driver

- 1 Disconnect the fixture from the wall by loosening the socket screws and the wiring.
- 2 Remove the cover(s) with a flat screwdriver.
- 3 Unscrew the glass cover(s), remove the reflector(s) and unscrew the holder(s) to remove the light source(s).
- 4 Unscrew the plate(s) and loosen the wires and screws to remove the driver(s).



The light source is replaceable by Wever & Ducré or by a professional with explicit authorization . For more information please contact your local Wever & Ducré customer service point.



The driver can be replaced by the end user.



This luminaire contains a light source with the energy class F.