



SLICE CIRCLE VI




BLANC



ALIMENTATION	230Vac 50Hz, incl. convertisseur
PUISSANCE	38/55W
KELVIN	3000K - 4000K - 3000/4000K
CRI	>80
DURÉE DE VIE	50'000h/L70/B50
MATÉRIEL	Polycarbonate
OPTIQUE	Diffuseur 110°
GARANTIE	5 ans


OPTIONS

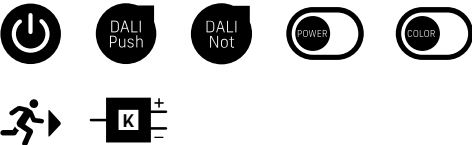

APPLICATIONS



ACCESSOIRES




SLICE CIRCLE VI N Ø 600mm - 38/55W

NEW

3800/5500lm - 3000/4000K
blanc - DALI/Push

Couleurs	Protection IP*	Variation	Kelvin	Fonctions	Montage	Article	Prix
	54	DALI Push	3000 4000		Twist	S40-32063-601DIG	398.00



SLICE CIRCLE VI Ø 600mm - 38/55W

3800/5500lm - 3000K blanc - DALI/Push		54	DALI Push	3000		Twist	S40-30060-601DIG	368.00
3800/5500lm - 3000K blanc - Not 1.5h		20	on/off	3000	Not	Twist	S40-30060-601NOT	388.00
3800/5500lm - 3000K blanc - DALI/Push - Not 1h		20	DALI Push	3000	Not	Twist	S40-30060-601DIG+NOT	448.00
3800/5500lm - 4000K blanc - DALI/Push		54	DALI Push	4000		Twist	S40-30061-601DIG	368.00
3800/5500lm - 4000K blanc - Not 1.5 h		20	on/off	4000	Not	Twist	S40-30061-601NOT	388.00
3800/5500lm - 4000K blanc - DALI/Push - Not 1h		20	DALI Push	4000	Not	Twist	S40-30061-601DIG+NOT	448.00