



PLUG & PLAY connection




to STRAIGHT CONNECTOR:




to T-CONNECTOR:

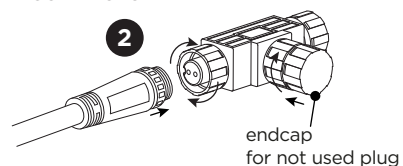

Do not cut off the connector.
This will cancel the warranty.

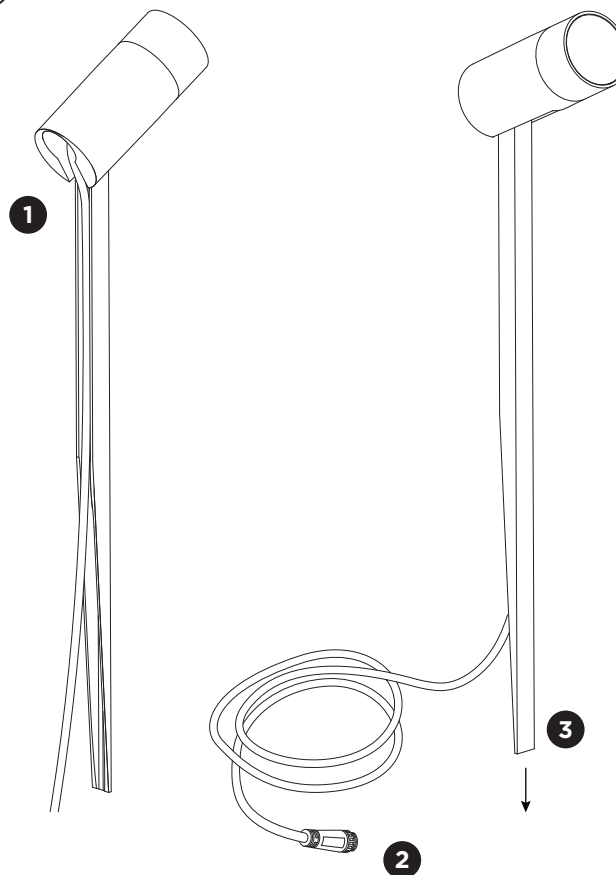

DIMENSIONS

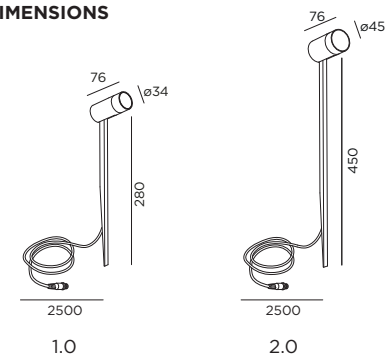


MOUNTING INSTRUCTION

- 1 Get sure the cable is in the slot on the backside of the spike.
- 2 **POWER CONNECTION**
Connect to the plug & play driver with a straight connector or T-connector.
For detailed information of the plug & play system see next page.
- 3 Put the fixture in the soil.



Place the cables deep enough in the ground or protect them with a cover/tube to avoid damage due to a shovel.

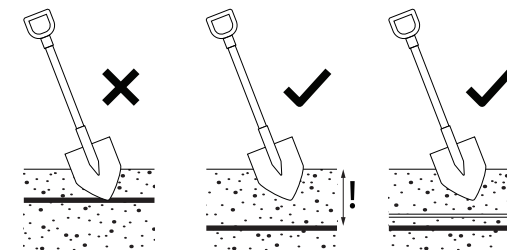


WEVER & DUCRÉ
LIGHTING

WEVER & DUCRÉ BV


Spinnerijstraat 99/21, 8500 Kortrijk, Belgium
weverducre.com

PLUG & PLAY SYSTEM


luminaire power	max. cable length in relation to distance to first luminaire								max. cable length
	≤5,0m	≤7,5m	≤10,0m	≤15m	≤20,0m	≤30,0m	≤40,0m	≤50,0m	
5W	50m	50m	50m	50m	50m	50m	50m	50m	
10W	50m	50m	50m	50m	50m	50m	50m	50m	
15W	50m	50m	50m	50m	50m	50m	50m	44m	
20W	50m	50m	50m	50m	50m	50m	26m	-	
25W	50m	50m	50m	50m	50m	26m	-	-	
30W	50m	50m	50m	50m	36m	6m	-	-	
35W	50m	50m	50m	38m	22m	-	-	-	
40W	50m	50m	42m	28m	12m	-	-	-	
45W	50m	42m	34m	20m	4m	-	-	-	
50W	42m	36m	28m	12m	-	-	-	-	
55W	38m	30m	22m	8m	-	-	-	-	
60W	32m	26m	18m	2m	-	-	-	-	
65W	30m	22m	14m	-	-	-	-	-	
70W	26m	18m	10m	-	-	-	-	-	
75W	24m	16m	8m	-	-	-	-	-	

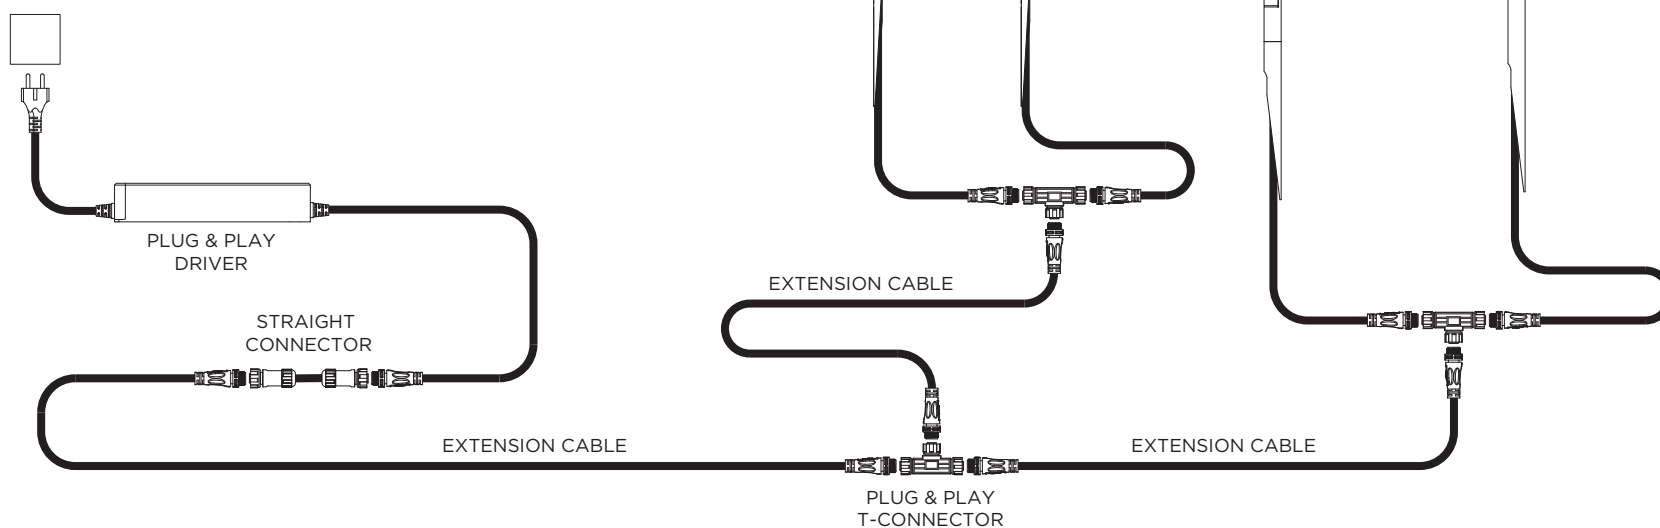

1.0

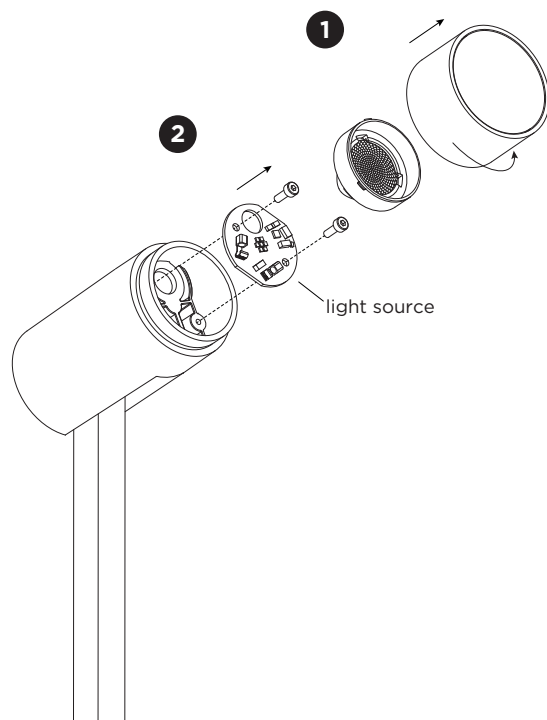


2.0

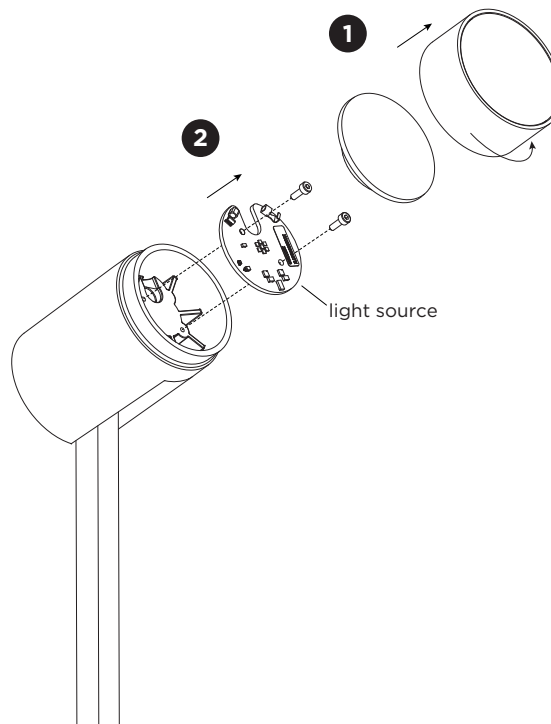

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1 Unscrew the cover and remove the lens.
- 2 Loosen the wires and remove the light source by unscrewing it.



The light source is replaceable by Wever & Ducré or by a professional with explicit authorisation. For more information please contact your local Wever & Ducré customer service point.



This luminaire contains a light source with the energy class G.

