


## Car-Go\_1 130 | 2.5 W | diffuse | Floor recessed

Drive over 2000 Kg | 20 km/h

### Technical Specifications

|                              |  |
|------------------------------|--|
| Source lamp                  | LED 2.5 W  |
| Total wattage                | 2.5  |
| Voltage                      | 24 Vdc   |
| Control                      | Power supply not included (other controls on request)  |
| Luminous flux (*Source flux) | 115 lm (285 lm*) @ 3000 K  |
| Luminous efficacy            | 45 lm/W @ 3000 K   |
| Light Temperature            | 3000 K   |
| McADAM steps                 | 3  |
| Beam                         | diffuse  |
| CRI                          | >90  |
| Life time                    | L80-B15 > 60.000 h Ta 40°C   |
| IP rating                    | 67   |
| IK rating                    | 10   |
| Insulation class             | III  |
| Note                         | Control on request: DALI - 1/10V - DMX - TRIAC<br>Light control on request: 2200K - 4000K - RGBW |




### Materials

|           |                              |
|-----------|------------------------------|
| Body      | Extruded aluminium EN AW6026 |
| Diffuser  | Opal glass                   |
| Finishing | White - Glass                |

E (lux)

| H(m) | lux @ 3000 K | Ø(m)  |
|------|--------------|-------|
| 1.00 | 35           | 3.49  |
| 2.00 | 9            | 6.98  |
| 3.00 | 4            | 10.48 |
| 4.00 | 2            | 13.97 |
| 5.00 | 1            | 17.46 |



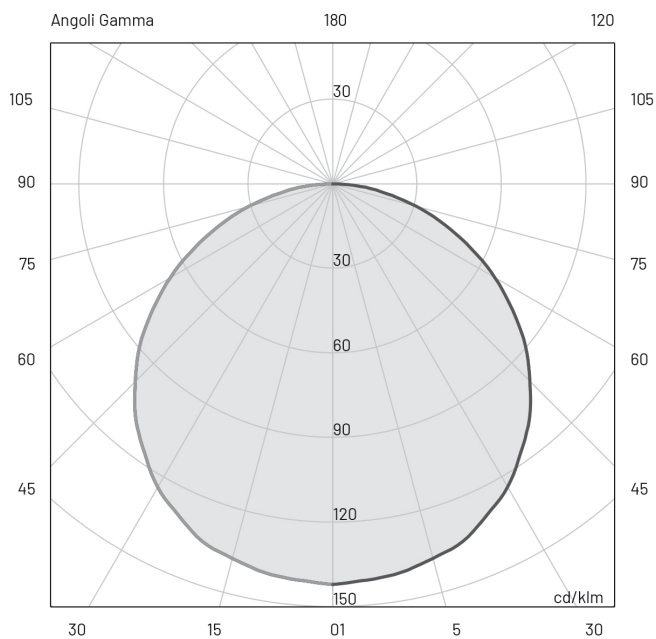


## Photometry



## Included accessories

|   |                            |
|---|----------------------------|
| - | 0.5 m length cable -05RN-F |
| - | Single connection IP68     |

## Available accessories

|            |  |   |
|------------|--|---|
| 00CCL1.STD | Housing box  |  |
| 0404M019   | Three-way connection box mini<br>Three-way connection box mini                     |  |
| 0409BT016  | Transformer _ 24 Vdc - 100 W<br>Transformer _ 24 Vdc - 100W (connect up to 20 pcs) |  |
| 0409BT014  | Transformer _ 24 Vdc - 12 W<br>Transformer _ 24 Vdc - 12W (connect up to 2 pcs)    |  |
| 0409BT015  | Transformer _ 24 Vdc - 25 W<br>Transformer _ 25 Vdc - 12W (connect up to 5 pcs)    |  |