

CASTOR


SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	2x7,2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x880
LIGHT COLOUR	[K]	2700 / 3000 / 4000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	122
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,10
GROSS WEIGHT	[kg]	1,13
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

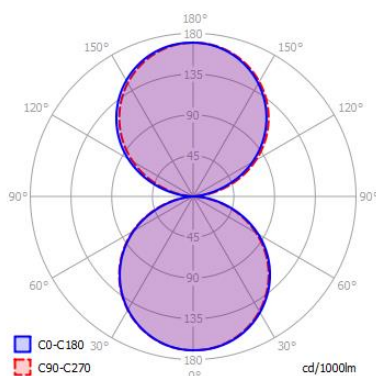

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

MOUNTING DIMENSIONS

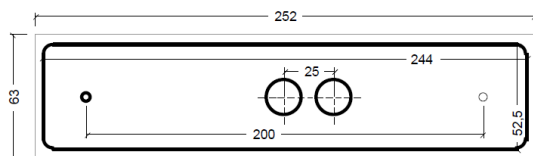

FIXTURE DIMENSIONS



DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING