


TRAM

INSTALLATION INSTRUCTIONS | JANUARY 2023

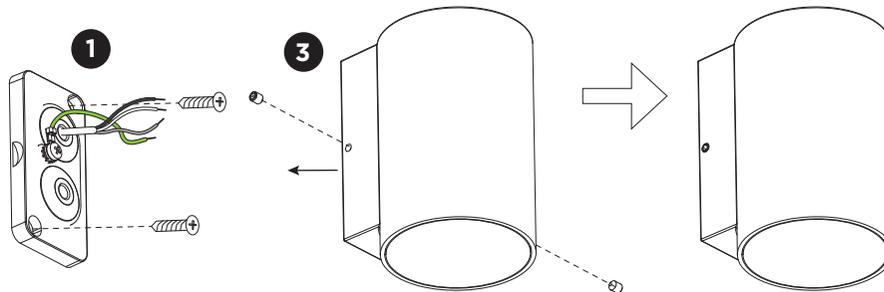

220-240V


Caution!
This is only applicable for model 1.0. Due to the minimalistic design of the luminaire the space inside is very limited. Wiring through is therefore not possible. Only the grommet on the upper side can be used for entering the fixture.

Mounting base:

grommets:

	A	B	C
use pin to make hole, not a knife			
CABLE			
TYPE	ROUND H05RN-F H07RN8-F H07RN-F	ROUND H05RN-F	ROUND
OUTSIDE Ø	min 6.8mm max 8.9mm	min 5mm max 6.8mm	min 1.5mm max 2.6mm
CONDUCTION SECTION	2or3x 0.75mm ² 2or3x 1.0mm ² 2or3x 1.5mm ²	2or3x 0.75mm ² 2x 1.0mm ²	0.75mm ² 1.5mm ²

DIMENSIONS

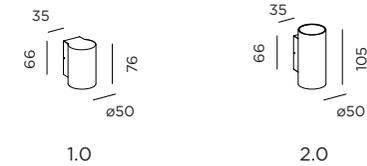


MOUNTING INSTRUCTION

1 Remove the mounting base from the luminaire by loosening the socket screws and mount it on the wall with screws (screws and plugs (if necessary) are included).

2 POWER CONNECTION

Connect to 220-240V.

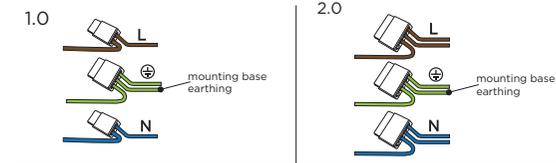


Connect the earth cable.



Please use a matching grommet based on the used 220-240V cable and the corresponding type in the overview table.


for example:

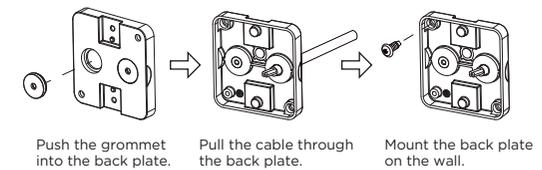

3 Fix the luminaire on the base with the socket screws.

TRAM


INSTALLATION INSTRUCTIONS | JANUARY 2023

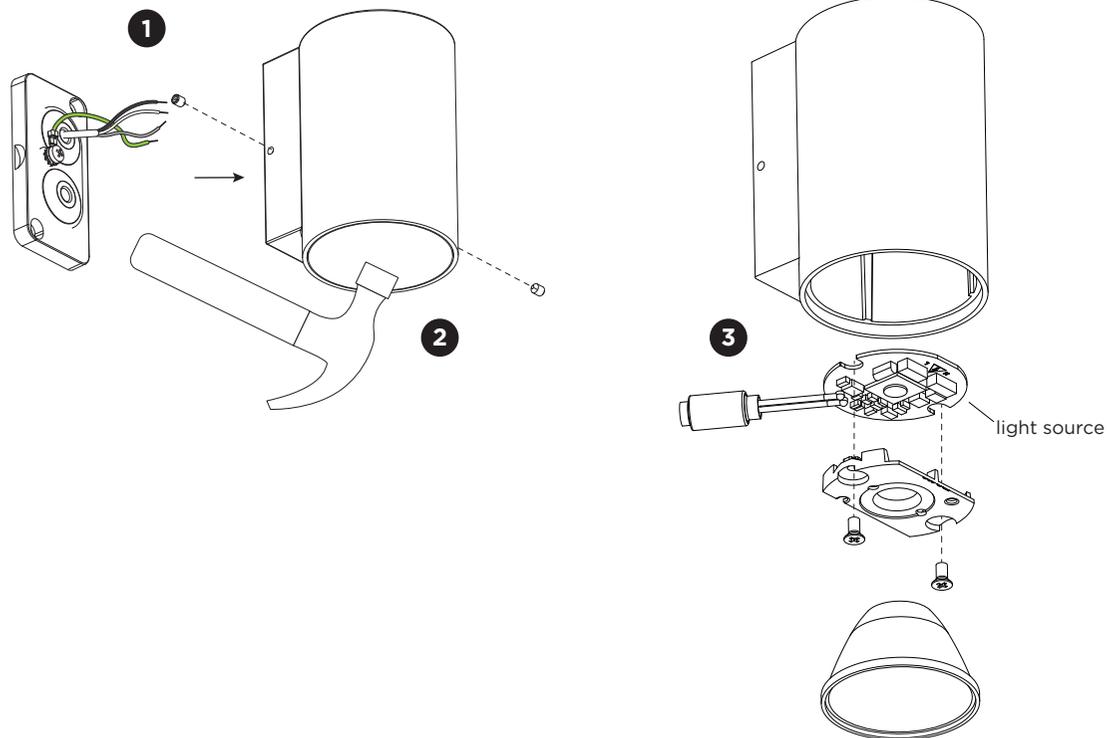

DISMOUNTING AND RECYCLING INSTRUCTIONS

Light source

- 1** Loosen the socket screws, disconnect the wires and remove the fixture from the mounting base.
- 2** Break the glass.
- 3** Take out the reflector and unscrew the holder to remove the light source.



The light source is not replaceable.



This luminaire contains a light source with the energy class F.