


Firefly | 2 W | Diffuse 360° | Pendants

Technical Specifications


Source lamp	LED 2 W
Total wattage	2
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	119 lm (160 lm*) @ 3000 K
Luminous efficacy	59.5 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	Diffuse 360°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	III
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Extruded aluminium EN AW6026
Diffuser	Opal PMMA
Finishing	Graphite - Polyester powder paint

Isolux

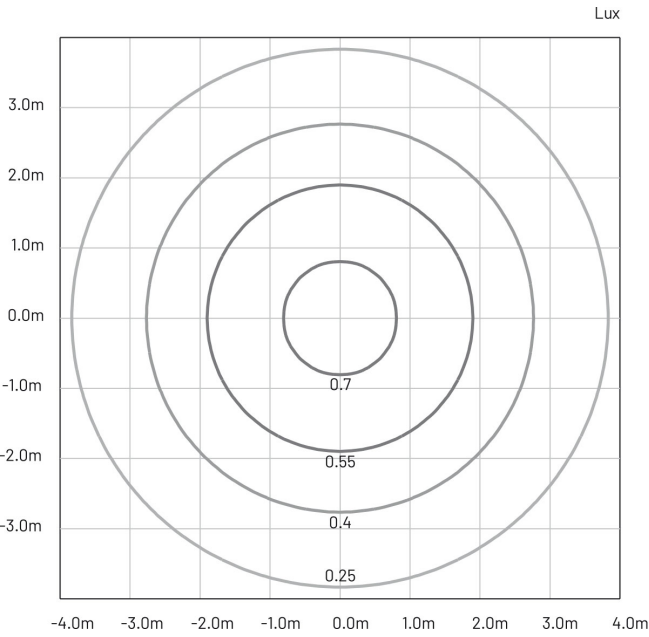


Photometry

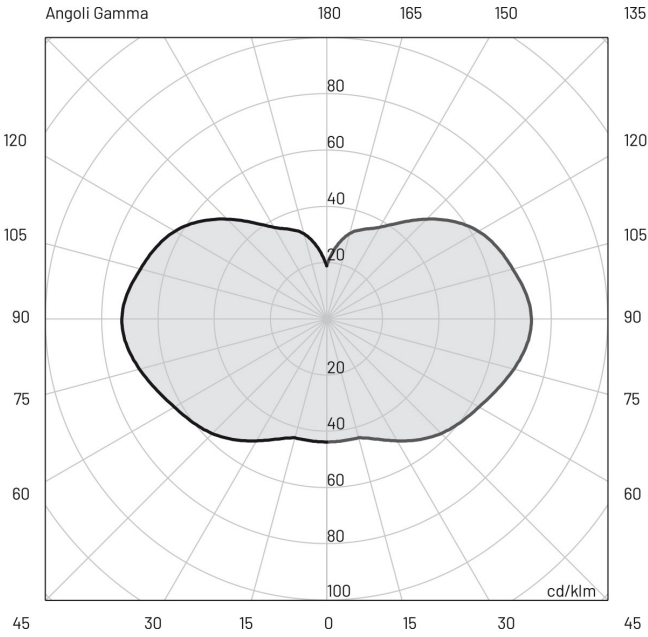

Included accessories

- 2 m length cable -05RN-F
- Cable clamp strip

Available accessories

0404M011	Single connection IP68	
0409BT016	Transformer _ 24 Vdc - 100 W Connect up to 30 device	
0409BT014	Transformer _ 24 Vdc - 12 W Connect up to 4 device	
0409BT015	Transformer _ 24 Vdc - 25 W Connect up to 8 device	