

FRANCIS READING

SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	4,5
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	580/610
COLOUR TEMPERATURE	[K]	2700/3000
CRI		>95
BEAM ANGLE		
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	128/135
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,178
GROSS WEIGHT	[kg]	
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		BRASS
COLOUR (HOUSING)		GUN METAL

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES




LIGHT DISTRIBUTION

xx°


Colours:



MOUNTING DIMENSIONS mm



FIXTURE DIMENSIONS mm

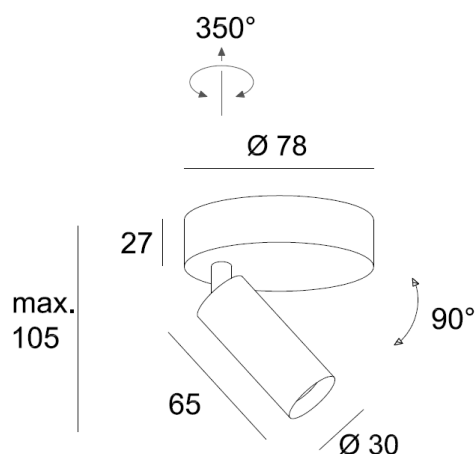

CRI > 95



IP20

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING