

INFINITY SILENT 900 2700K

SPECIFICATIONS

MOUNTING		ACOUSTIC LED PENDANT
POWER	[W]	3x17
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	2510
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		38°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	148

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO

MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	7.75
GROSS WEIGHT	[kg]	9.7

COLOUR (HOUSING)	BLACK -RAL9005
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK

*Luminous flux values are nominal LED data at a operating temperature of 25° C



Colours:




LIGHT DISTRIBUTION

38°


OPTIONS / OPTIONAL ACCESSORIES

INDIRECT LIGHTING LED-MODULE 15.5W	3000K / 4000K / 5000K
COLOUR (ACCENT RING)	BLACK
COLOUR (ACCENT RING)	GOLD
COLOUR (ACCENT RING)	SILVER



CUT OUT DIMENSIONS mm

FIXTURE DIMENSIONS mm

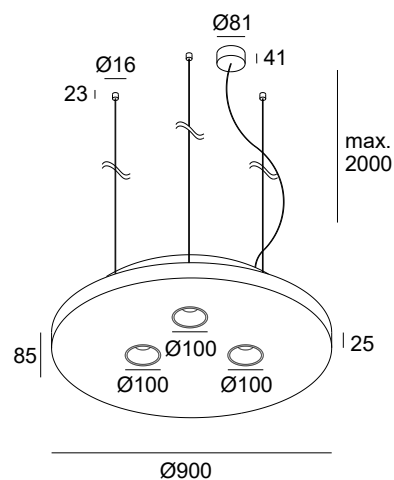

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

INFINITY SILENT 900 3000K

SPECIFICATIONS

MOUNTING		ACOUSTIC LED PENDANT
POWER	[W]	3x17
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	2550
COLOUR TEMPERATURE	[K]	3000
CRI		>90
BEAM ANGLE		38°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	150

POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO

MATERIAL		ALUMINUM AND ACOUSTIC MATERIAL
INGRESS PROTECTION		IP54
PROTECTION CLASS		III
NET WEIGHT	[kg]	7.75
GROSS WEIGHT	[kg]	9.7

COLOUR (HOUSING)	BLACK -RAL9005
COLOUR (ACOUSTIC MATERIAL)	VINTAGE RED
COLOUR (ACOUSTIC MATERIAL)	CORAL REEF
COLOUR (ACOUSTIC MATERIAL)	BRONZE SHADOW
COLOUR (ACOUSTIC MATERIAL)	SAVANNAH BROWN
COLOUR (ACOUSTIC MATERIAL)	TWILIGHT NAVY
COLOUR (ACOUSTIC MATERIAL)	FOREST CANOPY
COLOUR (ACOUSTIC MATERIAL)	CLOUDY BLUE
COLOUR (ACOUSTIC MATERIAL)	GOLDEN DUSK

*Luminous flux values are nominal LED data at a operating temperature of 25° C



Colours:




LIGHT DISTRIBUTION

38°


OPTIONS / OPTIONAL ACCESSORIES

INDIRECT LIGHTING LED-MODULE 15.5W	3000K / 4000K / 5000K
COLOUR (ACCENT RING)	BLACK
COLOUR (ACCENT RING)	GOLD
COLOUR (ACCENT RING)	SILVER



CUT OUT DIMENSIONS mm

FIXTURE DIMENSIONS mm

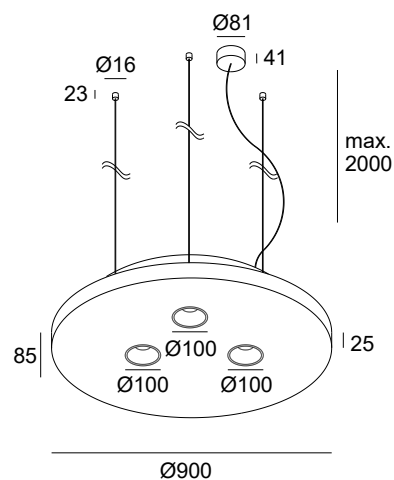

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING