

FLOS



FA54000312 Forest Green


Kirk 3

Designed by FLOS Outdoor, 2014



22W - 1610lm - 3000K - CRI> 80 - Beam° 40

LED source included. LED module configured to work directly on the mains 220-230V ON/OFF. Fixing bracket included. IP68 connector for 6mm<ø<8mm rubber cable. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use. Ground spike to be ordered separately.

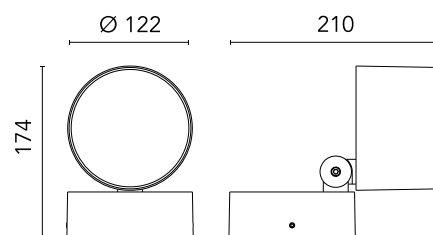

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8054793686219
Mounting	Ground
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	22
System power (W)	24
Source flux (lm)	2303
Lumen Output (lm)	1610

Physical

Colour	Forest Green
Orientation	Adjustable
Longitudinal tilting (°)	135
Net weight (kg)	1.43
Package height (mm)	175
Package width (mm)	135
Package length (mm)	135
IP internal	65

Download

Mounting instructions [↓ ZIP](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)




Ecodesign and Energy Labelling



Non-replaceable light source

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	40
Beam angle C90-270 (°)	40
Extreme cut off	No


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-230
Power supply type	Non Dimmable
Emergency	No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL
Accessory
F990E00A000
S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory
FA268
Ground Spike Kirk 3