


PROJECTOR

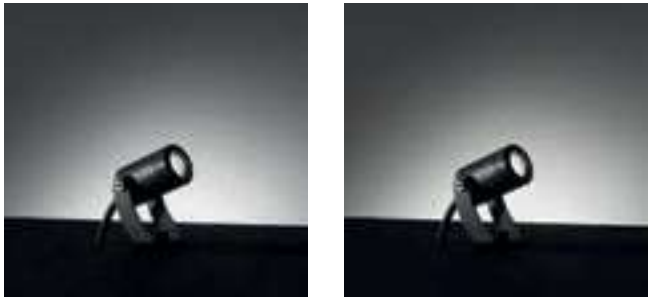

Wattage	2 W
Voltage	24 Vdc
Beam	
Adjustability	180° 360°
Technology	

Wattage	2 W
Voltage	24 Vdc
Beam	
Adjustability	180° 360°
Technology	


TECHNICAL SPECIFICATIONS

	SPOT
Source lamp	LED 2 W
Total wattage	2 W
Voltage	24 Vdc
Control	Power supply not included (other controls on request*)
Light colour	2700 K • 3000 K • 4000 K (other colours on request**)
Luminous flux	118 lm (160 lm***)
Luminous efficacy	59 lm/W
McADAM steps	3
Beam	12°
CRI	> 90
Life time	L80-B15 > 60.000 h T _a 40°C
IP rating	IP 67
IK rating	IK 08
Insulation class	III


- * Control available on request
DALI - 1/10V - DMX - TRIAC

** Light colour available on request
2200 K • RGBW

*** Source flux



E (LUX)			
H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	1136	1136	0.2
2.00	284	284	0.4
3.00	126	126	0.6
4.00	71	71	0.9
5.00	45	45	1.1



FLOOD

LED 2 W

2 W

24 Vdc

Power supply not included
(other controls on request*)2700 K • 3000 K • 4000 K
(other colours on request**)

102 lm (160 lm***)

51 lm/W

3

35°


> 90

L80-B15 > 60.000 h Ta 40°C

IP 67

IK 08

III

**E (LUX)**

H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	233	233	0.6
2.00	58	58	1.3
3.00	26	26	1.9
4.00	15	15	2.5
5.00	9	9	3.1

DIFFUSE

LED 2 W

2 W

24 Vdc

Power supply not included
(other controls on request*)2700 K • 3000 K • 4000 K
(other colours on request**)

17 lm (160 lm***)

8.5 lm/W

3

80°


> 90

L80-B15 > 60.000 h Ta 40°C

IP 67

IK 08

III

**E (LUX)**

H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	12	12	1.65
2.00	3	3	3.3
3.00	1	1	4.95
4.00	1	1	6.6
5.00	0	0	8.25

MATERIALS

Body

Extruded aluminium EN AW6060

Diffuser

Extra clear tempered glass 6 mm
Frosted tempered glass 6 mm (for diffuse beam)

Finishing

Polyester powder paint

ORDER CODE

LY 2 0 PRO _ _ B 7 Z _

Finishing

H

Grey

L

Graphite

Light colour

N

4000 K

H

3000 K

Y

2700 K

Beam

S

Spot

F

Flood

D

Diffuse

Example

LY 2 0 PRO **S** **N** **B** 7 Z **L****INCLUDED ACCESSORIES**

Code

Description

Page

-

1 m length cable -05RN-F

-

AVAILABLE ACCESSORIES

Code

Description

Page

00A469

Mounting spike

567

00KVISLY20_Visor (available in different colours,
see accessories section)

573

0404M009

Single connection IP68

574

0409BT014Transformer _ 24 Vdc - 12 W
(connect up to 4 pcs)

574

0409BT015Transformer _ 24 Vdc - 25 W
(connect up to 8 pcs)

574

0409BT016Transformer _ 24 Vdc - 100 W
(connect up to 30 pcs)

575