

SOLANA

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	9W
LAMP		Build-in LED
LUMINOUS FLUX*	[lm]	1478
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	165
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,68
GROSS WEIGHT	[kg]	0,70
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		ROYAL BRASS

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


Colours:



black/black



black/gold



white/black




white/gold



royal brass/black




royal brass




white/white


MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

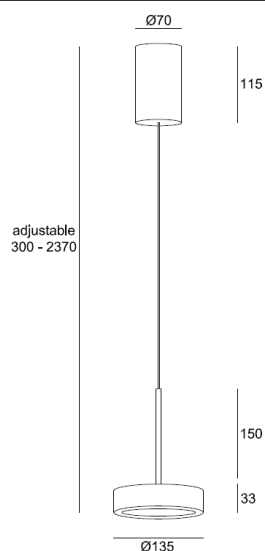

LIGHT DISTRIBUTION

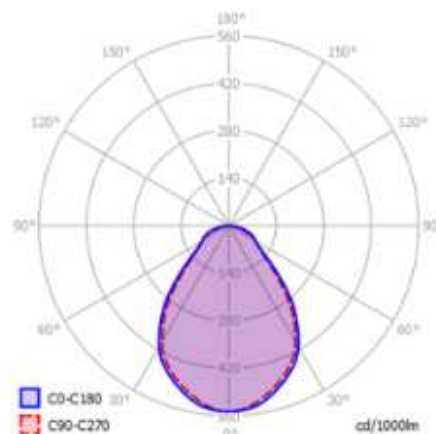

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING