



## AURA 1

---

LED-1L11E700K2/040 3K#

[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# AURA 1

Product code: AUR51221



Type: LED-1L11E700K2/040 3K#

Short description of the luminaire: White colour | ceiling or wall LED light ON/OFF | TRIPLEX OPAL hand blown glass shade|



## Technical

|                           |                                |
|---------------------------|--------------------------------|
| Types of luminaires       | Classic on/off                 |
| Mounting type             | surface mounted                |
| Base material             | steel                          |
| Shade material            | three-layer glass TRIPLEX OPAL |
| Base color                | white Ral9003                  |
| Shade color               | white                          |
| Holding the shade         | folding system                 |
| Mounting location         | ceiling/wall                   |
| Width                     | 220 mm                         |
| Length                    | 220 mm                         |
| Height                    | 110 mm                         |
| Diameter                  | ø 220 mm                       |
| mounting holes (diameter) | 4xø5mm                         |
| Cable entrance            | 2xø16mm                        |
| Energy Class              | D                              |
| Impact strength           | IK01                           |
| Operating temperature     | from -20°C to +30°C            |




## Electric

|                                     |                     |
|-------------------------------------|---------------------|
| Power consumption                   | 7 W                 |
| Ingress Protection                  | IP43                |
| Socket                              | LED modul           |
| terminal block                      | snap terminal block |
| Automatic circuit breaker type B10A | 50 pcs              |
| Automatic circuit breaker type B16A | 78 pcs              |
| Automatic circuit breaker type C10A | 84 pcs              |
| Automatic circuit breaker type C16A | 130 pcs             |

## Luminous


|                             |              |
|-----------------------------|--------------|
| Lum. flux of luminaire      | 690 lm       |
| Lum. flux of light source   | 1010 lm      |
| Luminaire efficacy          | 98 lm/W      |
| Temperature                 | 3000 K       |
| Rated life time LED L80/B10 | 100000 hours |
| CRI                         | Ra80         |
| MacAdam                     | 3            |
| Blue light hazard           | Risk group 0 |

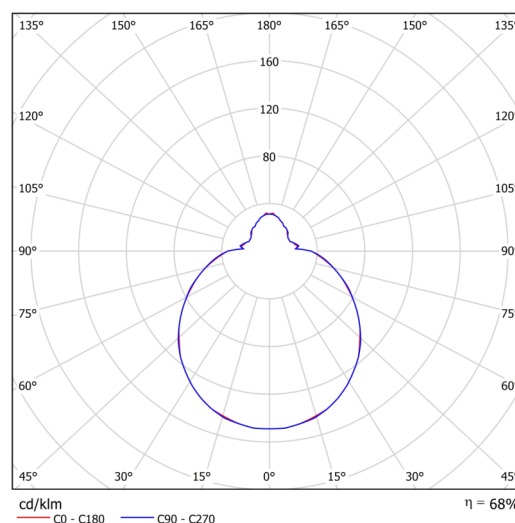

Eulum data for calculation programs are available at [www.osmont.cz](http://www.osmont.cz).

|                   |                      |
|-------------------|----------------------|
| EAN               | 8591728066413        |
| Weight NTO        | 1.2 Kg               |
| Weight BTO        | 1.4 Kg               |
| Number of cartons | 1 pcs                |
| Package volume    | 0.006 m <sup>3</sup> |
| Package 1 width   | 0.24 m               |
| Package 1 length  | 0.23 m               |
| Package 1 height  | 0.115 m              |
| Warranty*         | 60 months            |

### Installation dimensions:

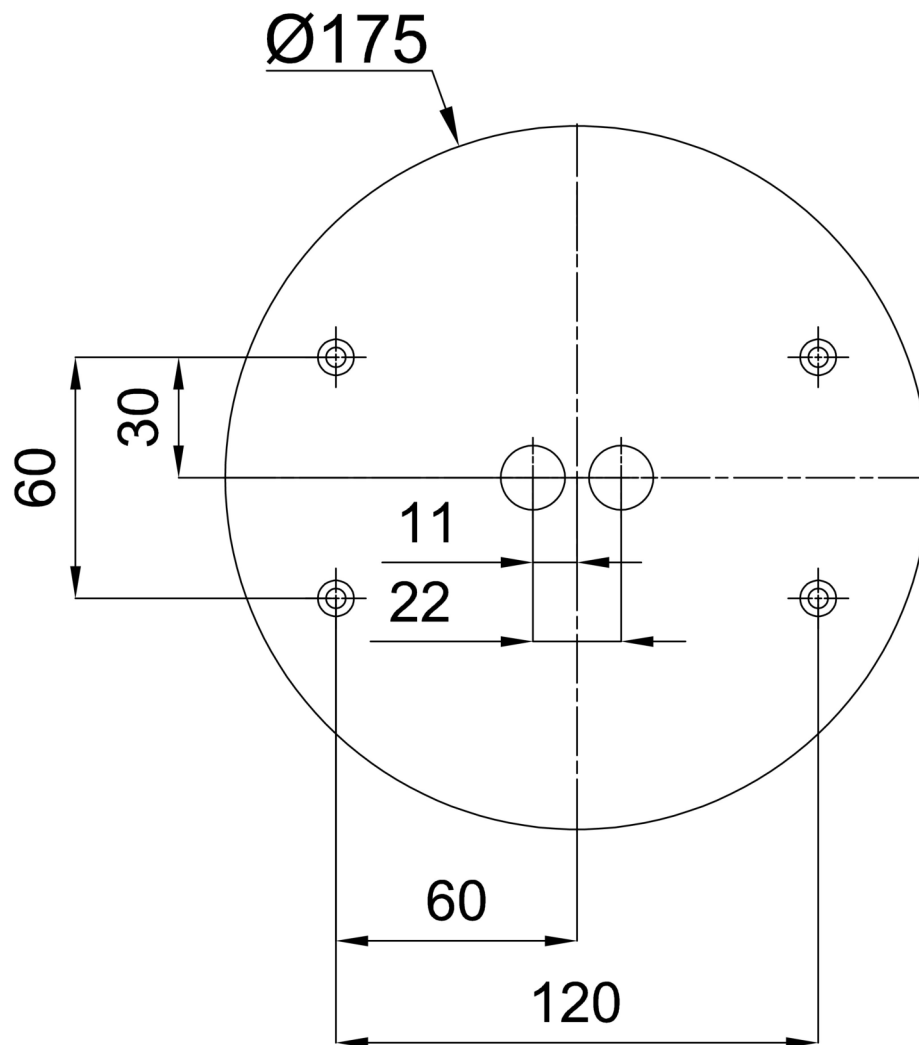

## Additional assortment:

## Decorative collar

| Product code | Name    | Color                          | Description   | Picture                                                                             | Drawing |
|--------------|---------|--------------------------------|---------------|-------------------------------------------------------------------------------------|---------|
| 30120        | K2/DL4  | white<br>Ral9003               | příslušenství |  |         |
| 30121        | K2/DL14 | polished<br>stainless<br>steel | příslušenství |  |         |
| 30122        | K2/DL15 | brushed<br>stainless<br>steel  | příslušenství |  |         |

## Lampshade

| Product code | Name | Color | Description   | Picture                                                                               | Drawing |
|--------------|------|-------|---------------|---------------------------------------------------------------------------------------|---------|
| 20001        | 040  | white | příslušenství |  |         |