


SLICE CIRCLE II



- BLANC
- ARGENT
- ANTHRACITE



● — 220mm
 — 50mm

ALIMENTATION 230Vac 50Hz, incl. convertisseur

PUISSANCE 10W - 10/15W

KELVIN 3000K - 4000K - 3000/4000K

CRI >80


DURÉE DE VIE 50'000h/L70/B50

MATÉRIEL Polycarbonate


OPTIQUE Diffuseur 110°

GARANTIE 5 ans

OPTIONS

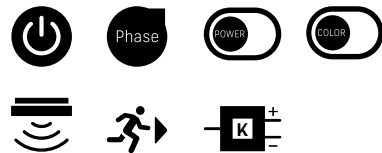

APPLICATIONS



SLICE CIRCLE II N
 Ø 220mm - 10/15W

NEW

	Couleurs	Protection IP*	Variation	Kelvin	Fonctions	Montage	Article	Prix
1000/1500lm - 3000/4000K blanc - dim. Phase	●	54	Phase	3000 4000		Click	S40-32063-221D	84.00
1000/1500lm - 3000/4000K blanc - Capteur	●	54	on/off	3000 4000	HF	Click	S40-32063-221S	104.00
1000/1500lm - 3000/4000K blanc - Not 1h	●	54	on/off	3000 4000	Not	Click	S40-32063-221NOT	154.00
1000/1500lm - 3000/4000K argent - dim. Phase	●	54	Phase	3000 4000		Click	S40-32063-220D	84.00
1000/1500lm - 3000/4000K argent - Capteur	●	54	on/off	3000 4000	HF	Click	S40-32063-220S	104.00
1000/1500lm - 3000/4000K anthracite - dim. Phase	●	54	Phase	3000 4000		Click	S40-32063-222D	84.00
1000/1500lm - 3000/4000K anthracite - Capteur	●	54	on/off	3000 4000	HF	Click	S40-32063-222S	104.00

SLICE CIRCLE II
 Ø 220mm - 10W

	Couleurs	Protection IP*	Variation	Kelvin	Fonctions	Montage	Article	Prix
1000lm - 3000K blanc - on/off	●	44	on/off	3000		Support	S40-30060-221	66.00
1000lm - 3000K argent - on/off	●	44	on/off	3000		Support	S40-30060-220	66.00
1000lm - 4000K blanc - on/off	●	44	on/off	4000		Support	S40-30061-221	66.00