


Car-Go_r 80 | 5 W | diffuse | Floor recessed

Drive over 500 Kg | 20 km/h

Technical Specifications

Source lamp	LED 5 W
Total wattage	5
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	155 lm (590 lm*) @ 3000 K
Luminous efficacy	31 lm/W @ 3000 K
Light Temperature	2700 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	III
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Extruded aluminium EN AW6026
Diffuser	Opal glass
Finishing	White - Glass

E (lux)

H(m)	lux @ 3000 K	Ø(m)
1.00	48	3.46
2.00	12	6.93
3.00	5	10.39
4.00	3	13.86
5.00	2	17.32



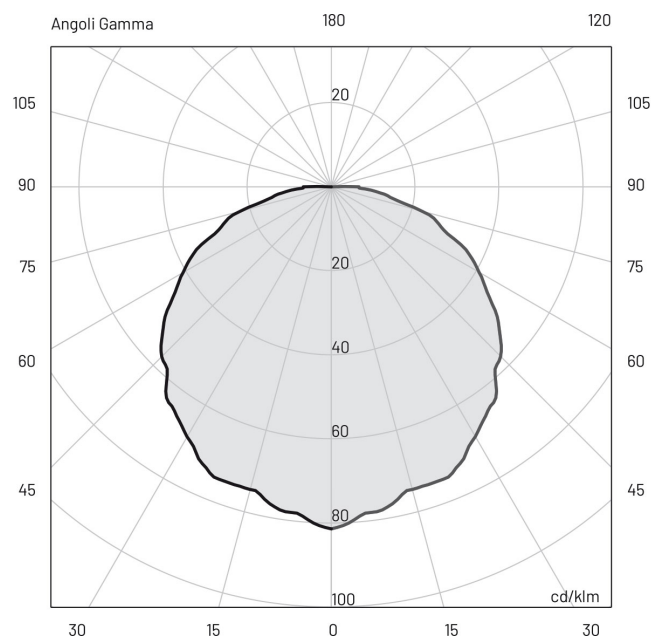

Photometry



Included accessories

-	1 m length cable -05RN-F
-	Housing box

Available accessories

0303003	Glass lifting suction pad	
00KCG.01	Recessed box adjusting kit	
0404M011	Single connection IP68	
0404M019	Three-way connection box mini	
0409BT016	Transformer _ 24 Vdc - 100 W connect up to 30 pcs	

0409BT014

Transformer _ 24 Vdc - 12 W
connect up to 4 pcs



0409BT015

Transformer _ 24 Vdc - 25 W
connect up to 8 pcs

