

CLEO MOVE

SPECIFICATIONS


MOUNTING		Ceiling
POWER	[W]	7
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	660 / 700
COLOUR TEMPERATURE	[K]	2700 / 3000
CRI		>80
BEAM ANGLE		73°
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	94 / 100
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP 20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,9
GROSS WEIGHT	[kg]	1,11
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		BRASS

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

global 1-phase adapter
3-phase universal adapter



LIGHT DISTRIBUTION


73°

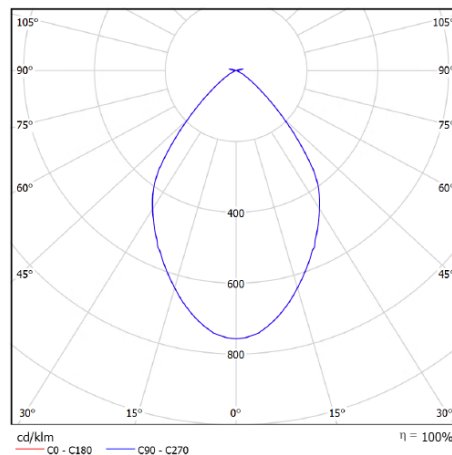

Colours:



black



white



brass




white/brass




black/brass

MOUNTING DIMENSIONS mm



FIXTURE DIMENSIONS mm

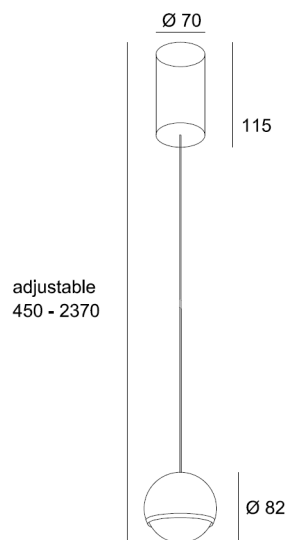

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING