


CLIPPO OPTIC ROYAL

SPECIFICATIONS

MOUNTING		CEILING / WALL
POWER	[W]	13
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	1320
COLOUR TEMPERATURE	[K]	2700
CRI		>90
BEAM ANGLE		36°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	125
POWER SUPPLY	[V] [A]	220-240V AC 50/60Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0.79
GROSS WEIGHT	[kg]	0.99
COLOUR (HOUSING)		ROYAL BRONZE
COLOUR (HOUSING)		ROYAL GOLD
CUT-OUT	[mm]	ROYAL GUN METAL
RECESSED DEPTH (H)	[mm]	ROYAL PURPLE
		ROYAL BRASS


*Luminous flux values are nominal LED

OPTIONS / OPTIONAL ACCESSORIES



LIGHT DISTRIBUTION

36°

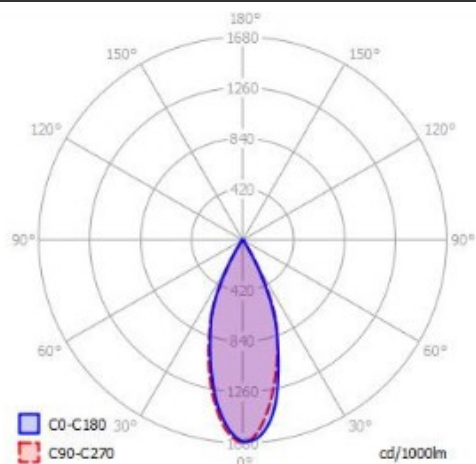

Colours:



royal bronze



royal gold



royal gun metal




royal purple




royal brass

MOUNTING DIMENSIONS mm

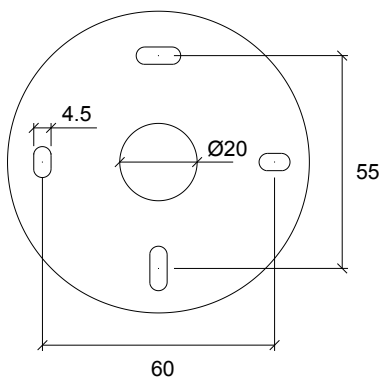

FIXTURE DIMENSIONS mm

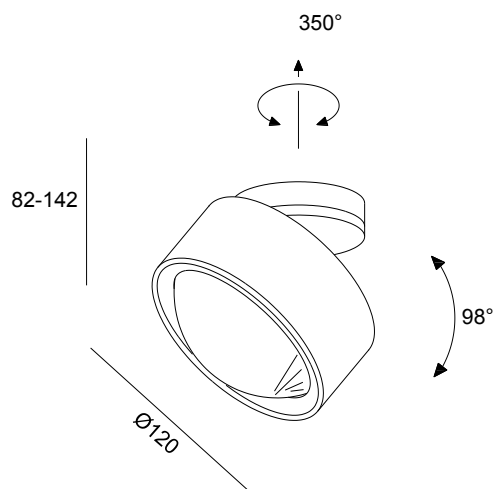

mounting on junction boxes (Ø68mm) possible



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING