

# CLIPPO S READING

## SPECIFICATIONS


MOUNTING		WALL
POWER	[W]	3,1 direct / 5 indirect
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	320 / 725
LIGHT COLOUR	[K]	2700 direct / 1800/2200/2700 ind.
CRI		>90
BEAM ANGLE	[°]	34 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	103 / 145
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,72
GROSS WEIGHT	[kg]	1,04
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

\*Luminous flux values are nominal LED data at a operating temperature of 25° C



## LIGHT DISTRIBUTION

34°

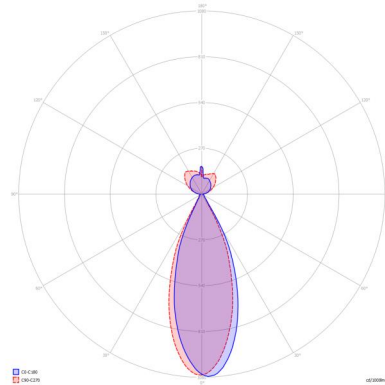

## OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 48
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



## Colours




white/white

white/gold


black/black

black/gold

## MOUNTING DIMENSIONS

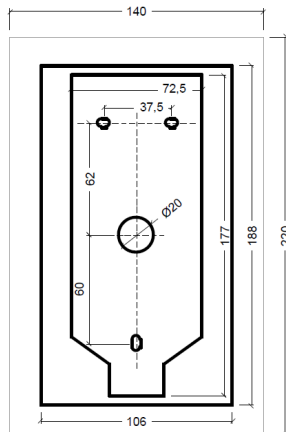

## FIXTURE DIMENSIONS

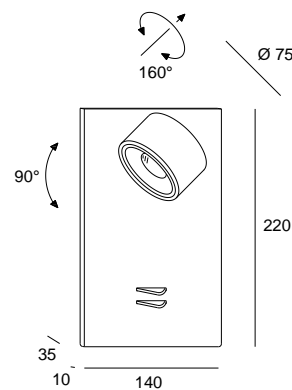

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING