

EAGLE R5L

Ref.	7ID50110
Colección / Collection / Collection	Indoor. TOP
Descripción / Description / Description	Dots LED

Características Luminaria / Light Data Sheet / Caractéristiques de la Luminaire


Material / Material / Matériau	Aluminio / Aluminium / Aluminium		
Material Dif. / Dif. Material / Matériau Dif.	PC		
Colores / Colours / Couleurs	9001 Blanco T.-Negro / T. White-Black / Blanc T.-Noir 9009 Blanco T.-Oro T. / T. White-Tec. Gold / Blanc T.- Or T. 9090 Blanco Tec. / Tec. White / Blanc Tec. 0101 Negro / Black / Noir 0109 Negro-Oro T. / Black-T. Gold / Noir-Or T.		
Vatios / Watts / Watts	10W		
Lúmens / Lumens / Lumens	3000K	4000K	
	Lm Final	800	840
	Lm Chip	1130	1200
Grados Apertura / Opening Angle / Angle d'ouverture	15°, 30°, 45°		
IP	20		
Tiempo de Uso (h/día) / Working Time (h/day) / Temps d'utilisation (h/jour)	12-14		
On/Off	15.000		
T.ª de Funcionamiento (Ta) / Working T.ª (Ta) / T.ª de Fonctionnement (Ta)	-20°C ~ +40°C		
H.ª de Funcionamiento / Working H. / H. de Fonctionnement	20-85% RH		
Peso / Weight / Poids	0,2 Kg		
Cantidad / Pieces / Quantité	1/50		

Características del Chip / Chip Data Sheet / Caractéristiques de la Puce

Marca / Brand / Marque	Bridgelux
Tipo / Type / Type	SMD 3030
L70B10	50.000 h
SDCM (Mac Adam)	5
EN62471	RG1
Eficiencia Nominal / Nominal Efficiency / Efficacité Nominal	113 lm/W (3K), 120 lm/W (4K)

Características Driver / Driver Data Sheet / Caractéristiques de l'Alimentateur

Ref.	Driver	Input Voltage	PF	Warranty	mA	Flicker
7ID50110-21N_-__	ON-OFF. Non Dimmable	AC220-240V 50/60Hz	>0,5	5	600	Free
7ID50110-32N_-__	1-10V Dimmable	AC220-240V 50/60Hz	>0,95	5	600	Free
7ID50110-51N_-__	Trailing Edge Dimmable	AC220-240V 50/60Hz	>0,9	5	600	Free
7ID50110-D2N_-__	DALI / PUSH Dimmable	AC220-240V 50/60Hz	>0,95	5	600	Free

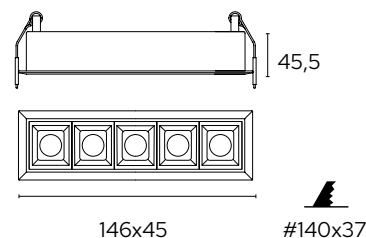

Colores / Colours / Couleurs



9001 Blanco T.-Negro /
T. White-Black / Blanc T.-Noir



9009 Blanco T.-Oro T. / T. White-Tec.
Gold / Blanc T.- Or T.



9090 Blanco Tec. / Tec. White /
Blanc Tec.



0101 Negro / Black / Noir



0109 Negro-Oro T. / Black-T. Gold /
Noir-Or T.

Opcional / Optional / Optionnel

Degree (A-15°)	Degree (J-30°)
3000K - Lm	3000K - 921 Lm
4000K - Lm	4000K - 968 Lm

Emergency KIT

-  2DCLEDK1
-  2DCLEDK2
-  2DCLEDK29

Documentos / Documents / Des documents

[Declaración de Conformidad UE / EU Declaration of Conformity / Déclaration de Conformité UE](#)

[Instrucciones de Instalación / Installation Instructions / Instructions d'Installation](#)

[Ficheros Fotométricos LDT / Photometrics File LDT / Fichier Photométrique LDT](#)

[Ficheros Fotométricos IES / Photometrics File IES / Fichier Photométrique IES](#)