

ELDORADO

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	9
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	1035
COLOUR TEMPERATURE	[K]	2700 / 3000 / 4000
CRI		>90
BEAM ANGLE		
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	115
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
NET WEIGHT	[kg]	1.05
GROSS WEIGHT	[kg]	1.23
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005



LIGHT DISTRIBUTION

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

GLASS C / R / MP


Colours:




black/black



black/white




white/white




white/black

MOUNTING DIMENSIONS mm

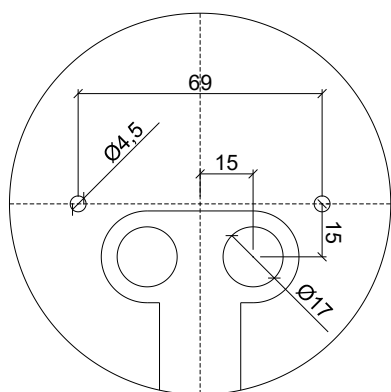

FIXTURE DIMENSIONS mm



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING