



## ERIS CV2

---

LED-1L14EMP700KV64/412C 4K#


[WWW.OSMONT.CZ](http://WWW.OSMONT.CZ)

# ERIS CV2

Product code: ERI67628



Type: LED-1L14EMP700KV64/412C 4K#

Short description of the luminaire: White colour | semi-recessed LED light ON/OFF | multipower driver | TRIPLEX OPAL hand blown glass shade with black decorative stripe|



## Technical data

Types of luminaires	Classic on/off
Mounting type	semi-recessed
Base material	steel
Shade material	three-layer glass TRIPLEX OPAL
Base color	white Ral9003
Shade color	white - black
Holding the shade	folding system
Mounting location	ceiling/wall
Width	340 mm
Length	340 mm
Height	100 mm
Diameter	ø 340 mm
mounting holes (diameter)	none
Cable entrance	2xø16mm
Energy Class	D
Impact strength	IK01
Operating temperature	from -20°C to +30°C




## Electrical data

Power consumption	18 W
Ingress Protection	IP44
Socket	LED modul
terminal block	snap terminal block
Automatic circuit breaker type B10A	37 pcs
Automatic circuit breaker type B16A	59 pcs
Automatic circuit breaker type C10A	37 pcs
Automatic circuit breaker type C16A	59 pcs
Spínací proud	15 A / 100 sec

## Luminous data

Lum. flux of luminaire	1410 lm
Lum. flux of light source	2810 lm
Luminaire efficacy	78 lm/W
Chromaticity temperature	4000 K
Rated life time LED L80/B10	100000 hours
CRI	Ra80
MacAdam	3
Blue light hazard	Risk group 0

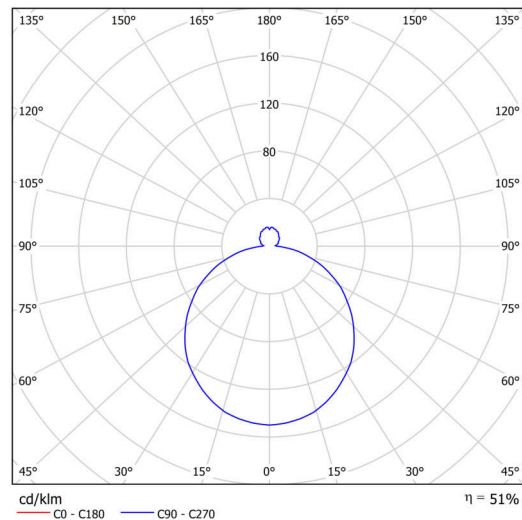

Eulum data for calculation programs are available at

**Multipower**

Possibility of output adjustment by the user (DIP switch on the current source).


I [mA]	700	650	600	550	500	450	400	
[%]	100	93	86	79	71	64	57	

**Logistical data**


EAN	8591728119331
Weight NTTO	3.35 Kg
Weight BTTO	3.55 Kg
Number of cartons	1 pcs
Package volume	0.034 m <sup>3</sup>
Package 1 width	0.382 m
Package 1 length	0.382 m
Package 1 height	0.234 m
Warranty*	60 months

\*The warranty for the batteries is valid for 36 months from the date of purchase.


**Installation dimensions:**



Svítlidlo nesmí být z horní strany zakryto izolací.  
Luminaire must not be covered with insulating matting.



Rozměry dutiny pro vestavné svítidlo [mm]:  
Dimensions of cavity for recessed luminaire [mm]:

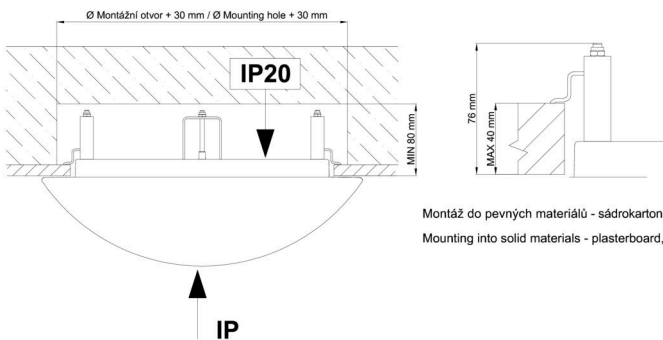

Montáž do pevných materiálů - sádkarton, dřevo.  
Mounting into solid materials - plasterboard, wood.

## Additional assortment:

## Lampshade

Product code	Name	Color	Picture	Drawing
20131	412C	white - black	