


Fog_1 300 | 12 W | diffuse | Wall recessed

Also available for ceiling/wall, ceiling recessed and projector

Technical Specifications

Source lamp	LED 12 W
Total wattage	16
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	510 lm (1340 lm*) @ 3000 K
Luminous efficacy	32 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Aluminium EN AW6060
Diffuser	Opal glass
Finishing	White - Polyester powder paint

E (lux)

H(m)	lux @ 3000 K	Ø(m)
1.00	169	3.21
2.00	42	6.42
3.00	19	9.62
4.00	11	12.83
5.00	7	16.04

Photometry

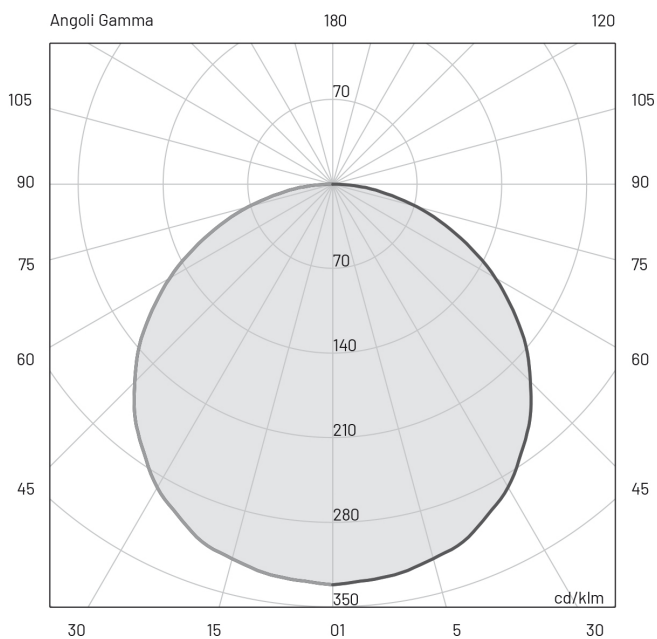

Included accessories

- 0.5 m length cable -05RN-F
- Single connection IP68

Available accessories

00EY/FGL3.STD Housing box

