


Fog_r 200 | 18.5 W | diffuse | Wall recessed

Also available for wall/ceiling and ceiling recessed

Technical Specifications


Source lamp	LED 18.5 W
Total wattage	23
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	1185 lm (2170 lm*) @ 3000 K
Luminous efficacy	52 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Die-cast aluminium EN47100
Diffuser	Opal glass
Finishing	White - Polyester powder paint

Isolux

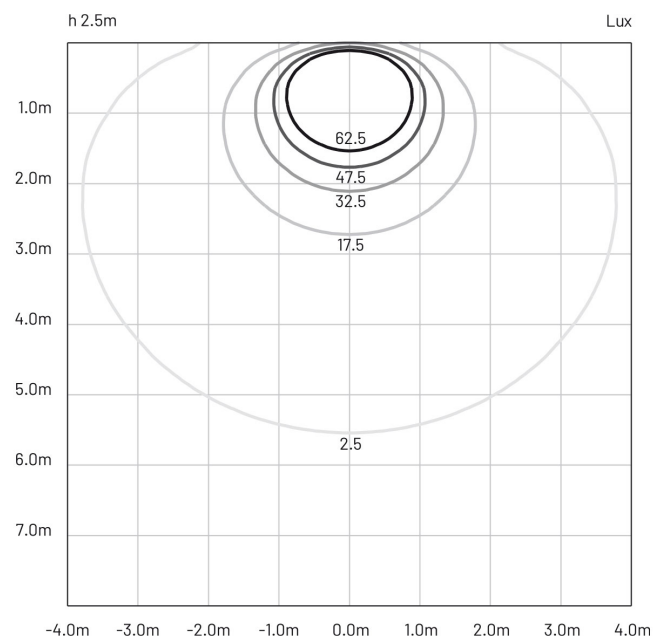

Photometry

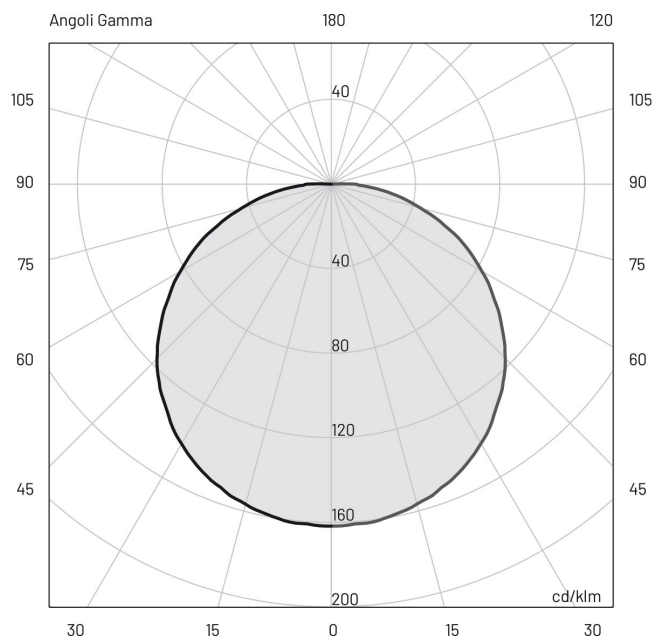

Included accessories

- Housing box

Available accessories

00KEY80 Leveling and plastering rim kit



010829800000 Plastering rim white finish

0303004 Suction cup to screw the glass

