


## Fog\_r 80 | 6 W | diffuse | Wall recessed

Also available for wall/ceiling and ceiling recessed

### Technical Specifications


Source lamp	LED 6 W
Total wattage	6
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	345 lm (700 lm*) @ 3000 K
Luminous efficacy	58 lm/W @ 3000 K
Light Temperature	2700 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	III
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




### Materials

Body	Die-cast aluminium EN47100
Diffuser	Opal glass
Finishing	White - Polyester powder paint

## Isolux

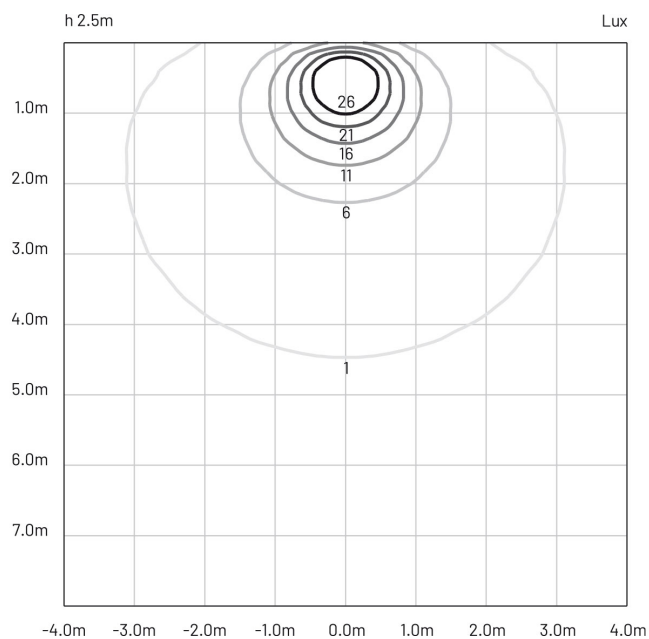

## Photometry

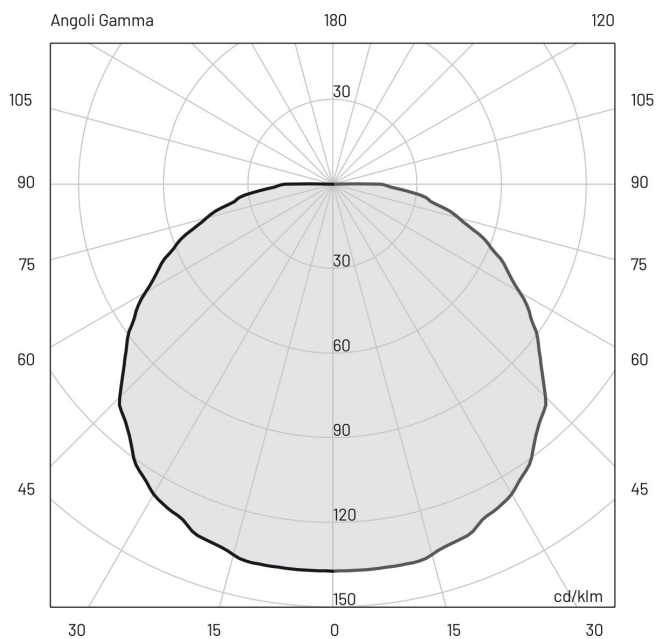

## Included accessories

- Housing box

## Available accessories

00KEY50 Leveling and plastering rim kit



010829600000 Plastering rim white finish

0303003 Suction cup to screw the glass



0409BT016 Transformer \_ 24 Vdc - 100 W  
(connect up to 16 pcs)



0409BT014 Transformer \_ 24 Vdc - 12 W  
(connect up to 2 pcs)



0409BT015 Transformer \_ 24 Vdc - 25 W  
(connect up to 4 pcs)

