
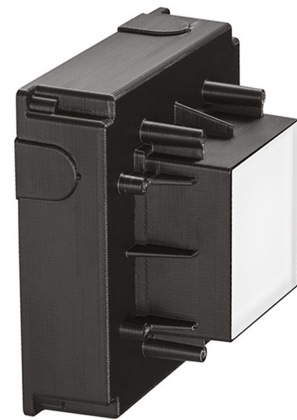


Fog_s 80 | 5.5 W | diffuse | Wall recessed

Also available for wall/ceiling and ceiling recessed

Technical Specifications


Source lamp	LED 5.5 W
Total wattage	5.5
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	205 lm (759 lm*) @ 3000 K
Luminous efficacy	37 lm/W @ 3000 K
Light Temperature	2700 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	III
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Die-cast aluminium EN47100
Diffuser	Opal glass
Finishing	White - Polyester powder paint

Isolux

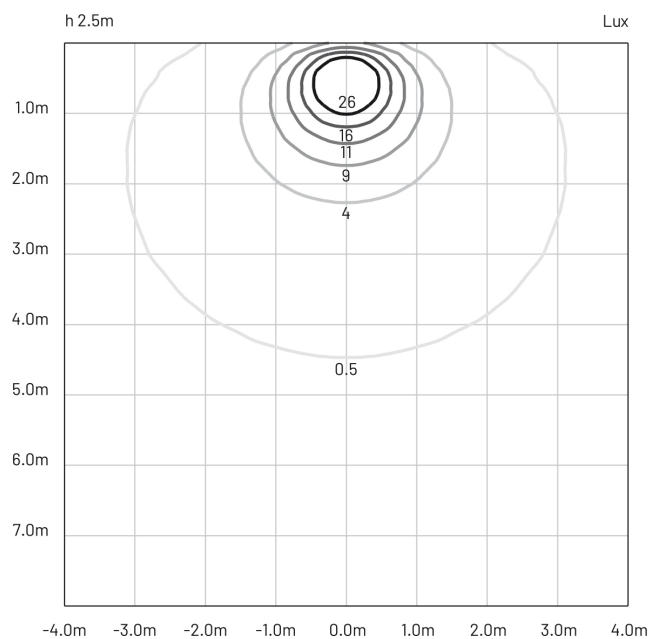



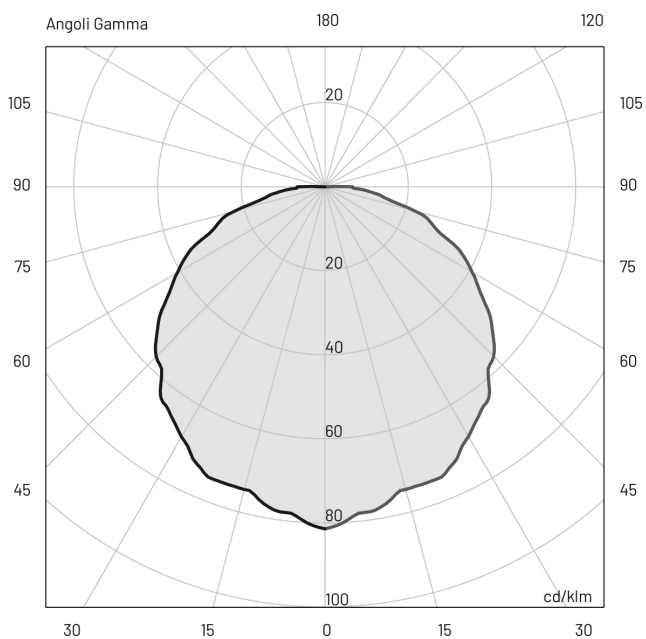

Photometry



Included accessories

- 0.5 m length cable -05RN-F
- Housing box
- Single connection IP68

Available accessories

- | | | |
|------------------|--|---|
| 0303003 | Glass lifting suction pad | |
| 00KCG0.02 | Recessed box adjusting kit |  |
| 0404M011 | Single connection IP68 |  |
| 0404M019 | Three-way connection box mini |  |
| 0409BT016 | Transformer _ 24 Vdc - 100 W
(connect up to 20 pcs) |  |

0409BT014

Transformer _ 24 Vdc - 12 W
(connect up to 2 pcs)



0409BT015

Transformer _ 24 Vdc - 25 W
(connect up to 5 pcs)

