

FRANCIS 68

SPECIFICATIONS

MOUNTING		CEILING
POWER	[W]	6.2
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	830 / 870
COLOUR TEMPERATURE	[K]	2700 / 3000
CRI		>95
BEAM ANGLE		36°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	134 / 140
POWER SUPPLY	[V] [A]	700mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0.29
GROSS WEIGHT	[kg]	0.33
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
COLOUR (HOUSING)		BRASS
COLOUR (HOUSING)		GUN METAL
CUT-OUT	[mm]	Ø68

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	15° / 50°
HONEY COMB LOUVER	



LIGHT DISTRIBUTION

36°

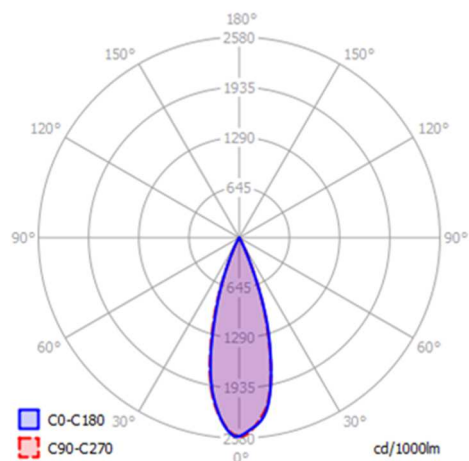

Colours:



black/black




black/gold




white/black



white/gold





brass/black




gun metal/black

CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm

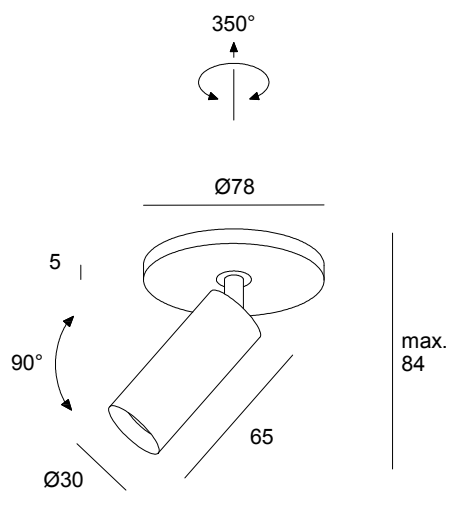

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING