

# FRANCIS

## SPECIFICATIONS

|                    |        |              |
|--------------------|--------|--------------|
| MOUNTING           |        | CEILING      |
| POWER              | [W]    | 6.2          |
| LAMP               |        | build-in LED |
| LUMINOUS FLUX*     | [lm]   | 830 / 870    |
| COLOUR TEMPERATURE | [K]    | 2700 / 3000  |
| CRI                |        | >90          |
| BEAM ANGLE         |        | 36°          |
| AVERAGE LIFETIME   | [h]    | L80/B50,000  |
| LUMINOUS EFFICACY  | [lm/W] | 134 / 140    |

|                |         |              |
|----------------|---------|--------------|
| POWER SUPPLY   | [V] [A] | 700mA CC     |
| LED-DRIVER     |         | NOT INCLUDED |
| DIMMING        |         | SEE DRIVER   |
| THROUGH-WIRING |         | SEE DRIVER   |

|                    |      |                |
|--------------------|------|----------------|
| MATERIAL           |      | ALUMINUM       |
| INGRESS PROTECTION |      | IP20           |
| PROTECTION CLASS   |      | III            |
| NET WEIGHT         | [kg] | 0.14           |
| GROSS WEIGHT       | [kg] | 0.17           |
| COLOUR (HOUSING)   |      | WHITE ~RAL9003 |
| COLOUR (HOUSING)   |      | BLACK ~RAL9005 |
| COLOUR (HOUSING)   |      | BRASS          |
| CUT-OUT            | [mm] | Ø48            |
| RECESSED DEPTH (H) | [mm] | 50             |

\*Luminous flux values are nominal LED data at a operating temperature of 25° C


## OPTIONS / OPTIONAL ACCESSORIES

|                   |           |
|-------------------|-----------|
| REFLECTOR         | 15° / 50° |
| HONEY COMB LOUVER |           |




## LIGHT DISTRIBUTION



36°

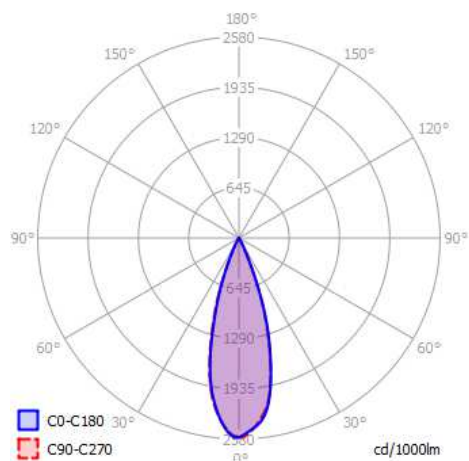


## Colours:



## CUT OUT DIMENSIONS mm



## FIXTURE DIMENSIONS mm

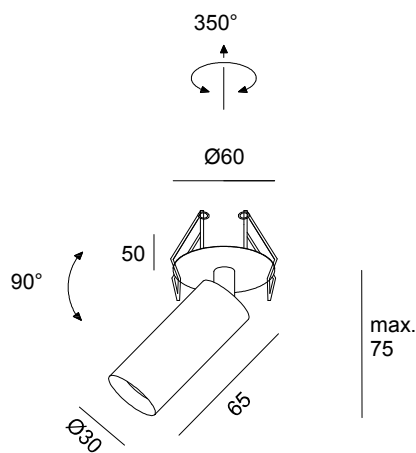

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING