

FRANCIS IN

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	5,3
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	710 / 740
COLOUR TEMPERATURE	[K]	2700 / 3000
CRI		>90
BEAM ANGLE		36°
AVERAGE LIFETIME	[h]	L80/B50,000
LUMINOUS EFFICACY	[lm/W]	133 / 139


POWER SUPPLY	[V] [A]	600mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0.14
GROSS WEIGHT	[kg]	0.17
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø38
RECESSED DEPTH (H)	[mm]	75

*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	15° / 50°
HONEY COMB LOUVER	



LIGHT DISTRIBUTION



36°

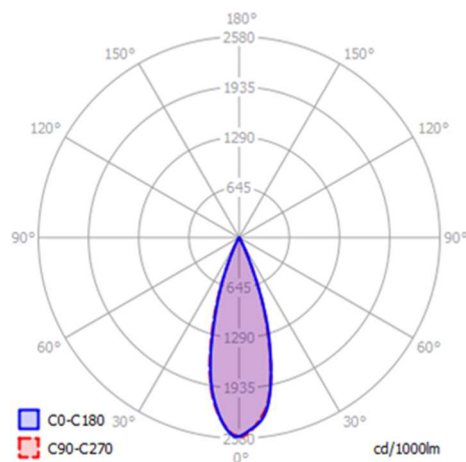


Colours:



CUT OUT DIMENSIONS mm



FIXTURE DIMENSIONS mm

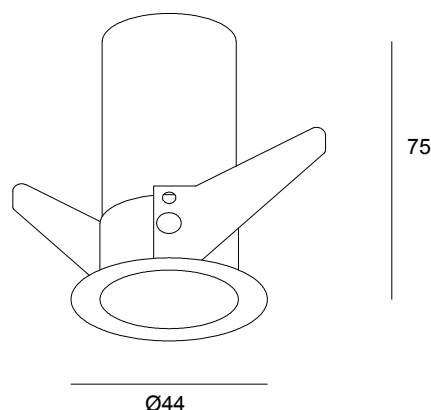

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING