


Kalan 550 | 8 W | diffuse (indirect) | Wall lamps

Also available for ceiling applications

Technical Specifications


Source lamp	LED 8 W
Total wattage	10
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	210 lm (280 lm*) @ 3000 K
Luminous efficacy	22 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	diffuse (indirect)
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	II
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - RGBW

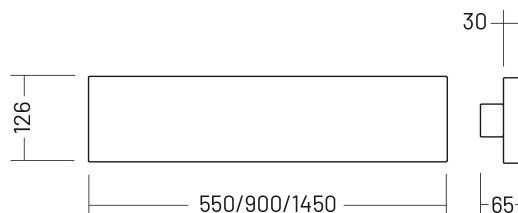


Materials

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Accoya® clear wood - Acetylation treatment

Isolux

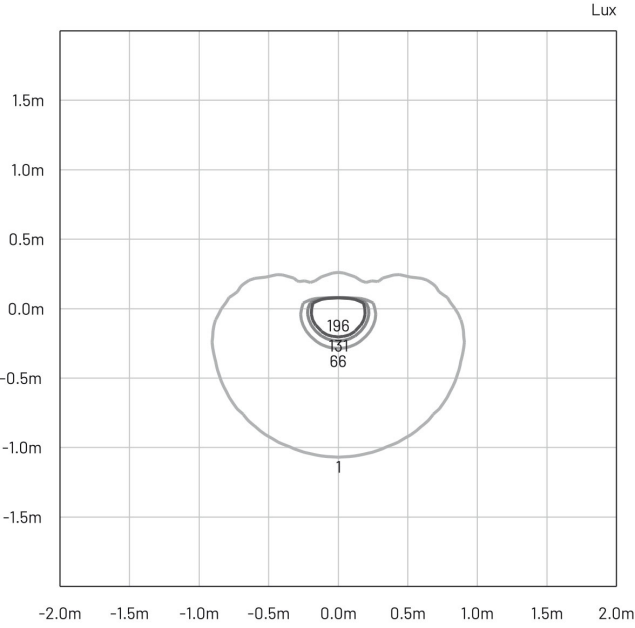

Photometry

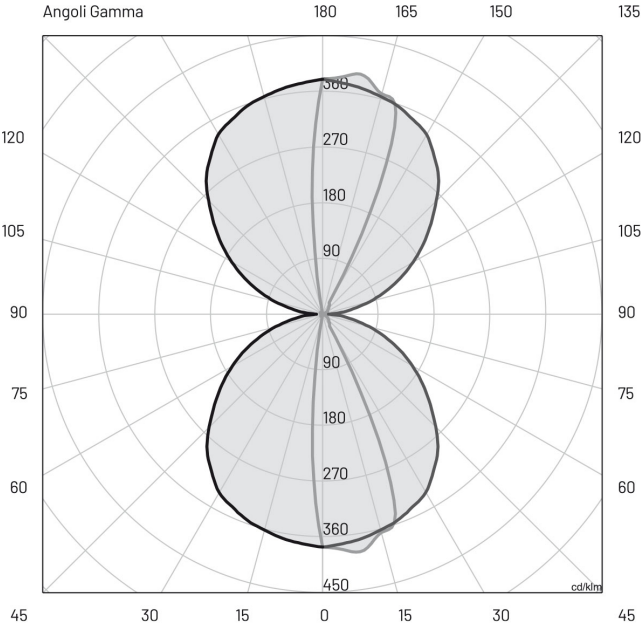

Included accessories

- Single connection IP68

Available accessories

00COVKL05.01	Kalan 550 cover 1	
00COVKL05.02	Kalan 550 cover 2	
00COVKL05.03	Kalan 550 cover 3	
00COVKL05.04	Kalan 550 cover 4	