

FLOS

FA54000133.A Anthracite

Kirk 1

Designed by FLOS Outdoor, 2014




5W - 270lm - 3000K - CRI> 80 - Beam° 49

LED source included. LED module configured to work directly on the mains 220-230V ON/OFF. Fixing bracket included. IP68 connector for 6mm<ø<8mm rubber cable. To ensure the tightness of the cable guide it's recommended to use flexible electric cables suitable for exterior use. Ground spike to be ordered separately.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

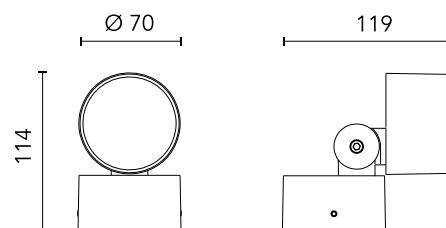

Main specifications

EAN	8054793685274
Mounting	Ground
Light source type	LED
Light sources included	Yes
LED type	LED array
Number of lamps	1
Power (W)	5
System power (W)	6
Source flux (lm)	387
Lumen Output (lm)	270

Physical

Colour	Anthracite
Orientation	Adjustable
Longitudinal tilting (°)	135
Net weight (kg)	0.5
Package height (mm)	134
Package width (mm)	134
Package length (mm)	83
IP internal	65

Download

Mounting instructions [ZIP](#)

Photometric Files

LDT / IES [ZIP](#)

Technical Drawings

2D [ZIP](#)

3D [ZIP](#)




Ecodesign and Energy Labelling



Non-replaceable light source

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	80
Beam angle C0-180 (°)	49
Beam angle C90-270 (°)	49
Extreme cut off	No


Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-230
Power supply type	Non Dimmable
Emergency	No

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



OPTIONAL
Accessory
F990E00A000
S.P.D. (SURGE PROTECTION
DEVICE)



OPTIONAL
Accessory
FA264
Ground Spike Kirk 1