


Kami_2 | 10 W | diffuse | Wall lamps

Also available for ceiling

Technical Specifications


Source lamp	LED 10 W
Total wattage	13
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	570 lm (1200 lm*) @ 3000 K
Luminous efficacy	44 lm/W @ 3000 K
Light Temperature	4000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - RGBW



Materials

Body	Die-cast aluminium EN47100
Diffuser	Opal polycarbonate
Finishing	Graphite - Polyester powder paint

Isolux

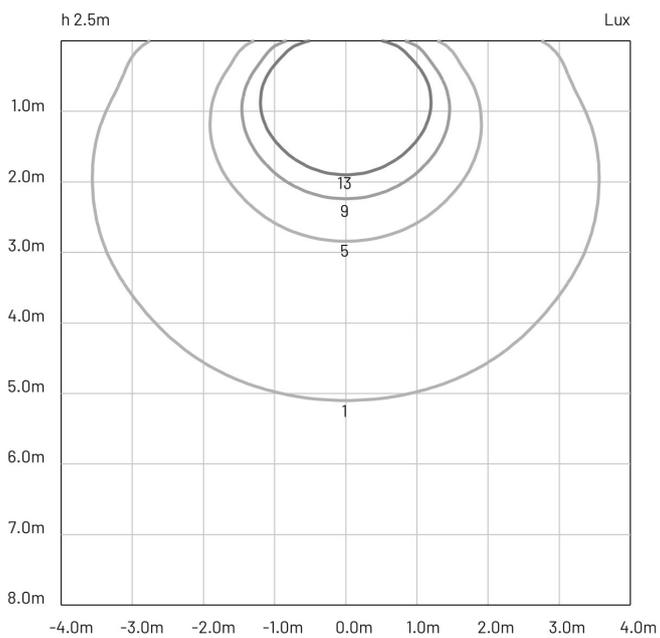

Photometry

