

LARA FLEX

SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	3
LAMP		build-in LED
LUMINOUS FLUX*	[lm]	166
LIGHT COLOUR	[K]	2700K
CRI		>90
BEAM ANGLE	[°]	15
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	55

POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		YES
THROUGH-WIRING		NO

MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,30
GROSS WEIGHT	[kg]	0,46

COLOUR (HOUSING)	WHITE ~RAL9003
COLOUR (HOUSING)	BLACK ~RAL9005

INCLUDING USB PORT FOR DEVICE CHARGING



LIGHT DISTRIBUTION

xx°

n/A


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

Colours:




black





white

MOUNTING DIMENSIONS

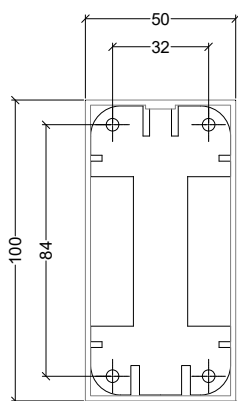

FIXTURE DIMENSIONS

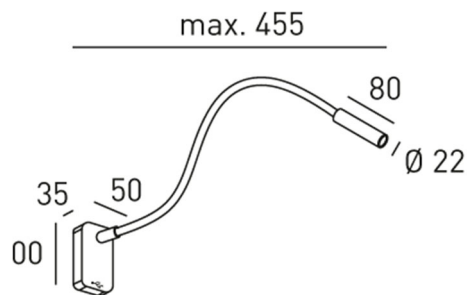

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING