


## Lyras 65 | 5 W | flood 40° | Projectors

Also available for ceiling

### Technical Specifications

Source lamp	LED 5 W
Total wattage	5
Voltage	24 Vdc
Control	Power supply not included • dimmable on request
Luminous flux (*Source flux)	310 lm (480 lm*) @ 4000 K
Luminous efficacy	62 lm/W @ 4000 K
McADAM steps	3
Beam	flood 40°
CRI	>80
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	II




### Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear tempered glass 8 mm
Finishing	Grey - Polyester powder paint

E (lux)

H(m)	lux(3000 K)	lux(4000 K)	Ø(m)
1.00	594	594	0.7
2.00	149	149	1.4
3.00	66	66	2.1
4.00	37	37	2.8
5.00	24	24	3.5

Photometry

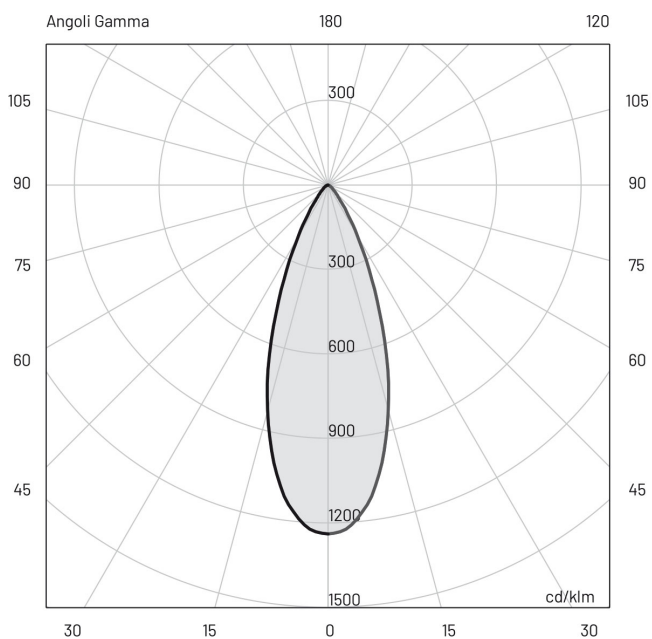

### Included accessories

- 1 m length cable H05RN-F

### Available accessories

00A469	Mounting spike
0404M009	Single connection IP68
0409BT016	Transformer _ 24 Vdc - 100 W Connect up to 12 device
0409BT014	Transformer _ 24 Vdc - 12 W Connect up to 1 device
0409BT015	Transformer _ 24 Vdc - 25 W Connect up to 3 device