

BLADE SPRING VERSIONS ONLINE
weverducre.com/more-match-recessed

MATCH



Ceiling recessed



reddot winner 2023



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

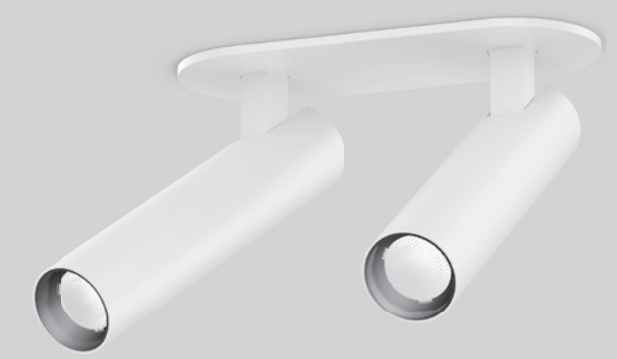

1.0

LED COB 6W | 350mA | 18V
aluminium

IP20 0°-90°/350° A 30° SDCM2 L80|50K 0.16kg

wire springs 45-47 85 4-26

CODE	
	190151W_
	190151BL_
	190151CH_
	190151B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x535 >90	3
3000K	2x560 >90	5

ALWAYS USE

driver | 350mA

CODE	
6W	90213303
7W dim	90223301
14W DALI*	90243501

*revision opening required
 more options and specs on page 806



2.0

2x LED COB 6W | 700mA | 18V
aluminium

IP20 0°-90°/350° A 30° SDCM2 L80|50K 0.27kg

wire springs 105x30 60 4-26

CODE	
	190251W_
	190251B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x535 >90	3
3000K	2x560 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE	
15W dim	90225502
28W DALI	90245704

more options and specs on page 809



1.0 TRIMLESS

LED COB 6W | 350mA | 18V
aluminium

IP20 0°-90°/360° A 30° SDCM2 L80|50K 0.15kg

wire springs 45-47 67 4-26

CODE	
	190851W_
	190851BL_
	190851B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	560 >90	5

ALWAYS USE

driver | 350mA

CODE	
6W	90213303
7W dim	90223301
14W DALI	90243501

revision opening required
 more options and specs on page 806