






mira 150



FLOOR RECESSED



Wattage	8.5 W
Voltage	220-240 Vac
Beam	
Technology	
Drive over	 max 20 km/h max 2000 kg

Wattage	8.5 W
Voltage	220-240 Vac
Beam	
Technology	
Drive over	 max 20 km/h max 2000 kg

Wattage	8.5 W
Voltage	220-240 Vac
Beam	
Technology	
Drive over	 max 20 km/h max 2000 kg

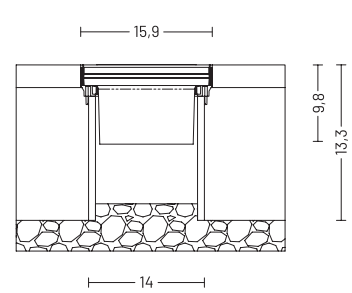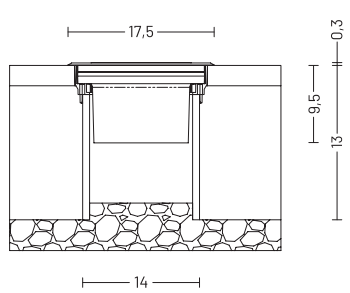




414

mira 150

TECHNICAL
SPECIFICATIONS

	SPOT	MEDIUM	WIDE FLOOD
Source lamp	LED 8.5 W	LED 8.5 W	LED 8.5 W
Total wattage	11 W	11 W	11 W
Voltage	220-240 Vac - 50/60 Hz	220-240 Vac - 50/60 Hz	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request*)	On/Off (other controls on request*)	On/Off (other controls on request*)
Light colour	2700 K • 3000 K (other colours on request**)	2700 K • 3000 K (other colours on request**)	2700 K • 3000 K (other colours on request**)
Luminous flux	864 lm (945 lm***) @ 3000 K	673 lm (945 lm***) @ 3000 K	656 lm (945 lm***) @ 3000 K
Luminous efficacy	79 lm/W @ 3000 K	61 lm/W @ 3000 K	61 lm/W @ 3000 K
McADAM steps	3	3	3
Beam	spot 11°	medium 30°	wide flood 60°
CRI	>90	>90	>90
Life time	L80-B15 > 60.000 h Ta 40°C	L80-B15 > 60.000 h Ta 40°C	L80-B15 > 60.000 h Ta 40°C
IP rating	67	67	67
IK rating	10	10	10
Insulation class	I	I	I

- * Control available on request
DALI - 1/10V - DMX - TRIAC
- ** Light colour available on request
2200 K • 4000 K • RGBW
- *** Source flux

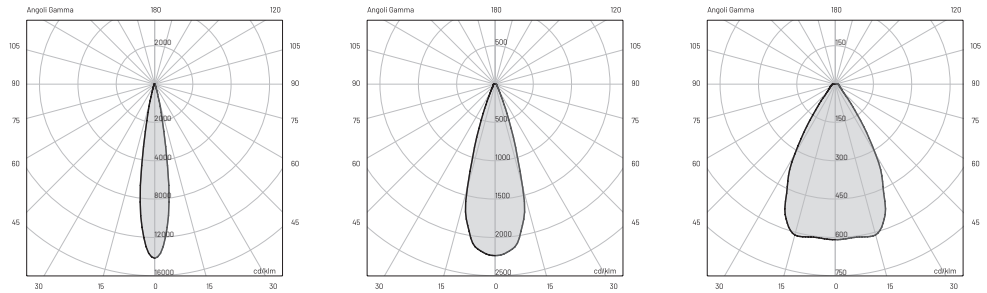

E (LUX)			E (LUX)			E (LUX)		
H (m)	lux (3000 K)	Ø (m)	H (m)	lux (3000 K)	Ø (m)	H (m)	lux (3000 K)	Ø (m)
1.00	13670	0.2	1.00	2020	0.6	1.00	636	1.2
2.00	3420	0.4	2.00	506	1.1	2.00	159	2.3
3.00	1520	0.6	3.00	225	1.6	3.00	71	3.5
4.00	855	0.8	4.00	127	2.2	4.00	40	4.7
5.00	540	1	5.00	81	3	5.00	25	5.9

ASYMMETRIC

LED 8.5 W

11 W

220-240 Vac - 50/60 Hz

On/Off (other controls on request*)

2700 K • 3000 K
(other colours on request**)

623 lm (945 lm***) @ 3000 K

57 lm/W @ 3000 K

3

asymmetric 70° x 840°



>90

L80-B15 > 60.000 h Ta 40°C

67

10

I

**MATERIALS**

Body

Die-cast aluminium EN47100

Diffuser

Extra clear tempered glass 12 mm

Finishing

Inox AISI 316L

ORDER CODE

MI 75 V0_ _ _ B 10 Z

Light colour H 3000 K

Y 2700 K

Beam S Spot

M Medium

W Wide flood

A Asymmetric

Model 2 Round frame

3 Round frame
for flush-mounted
installation

4 Square frame

Example MI 75 V02 S H B 10 Z

INCLUDED ACCESSORIES

Code	Description	Page
-	0.5 m length cable H05RN-F	-
-	Housing box	-

AVAILABLE ACCESSORIES

Code	Description	Page
0201007V0200	Sandblasted glass	573



