


Mira 220 | 19.5 W | medium 30° | Floor recessed

Round frame

Technical Specifications

Source lamp	LED 19.5 W
Total wattage	23
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	1465 lm (2093 lm*) @ 3000 K
Luminous efficacy	64 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	medium 30°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	10
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Die-cast aluminium EN47100
Diffuser	Extra clear tempered glass 19 mm
Finishing	Inox AISI 316L - Inox AISI 316L

E (lux)

H(m)	lux @ 3000 K	Ø(m)
1.00	4300	0.5
2.00	1070	1.1
3.00	470	1.6
4.00	270	2.2
5.00	170	2.8



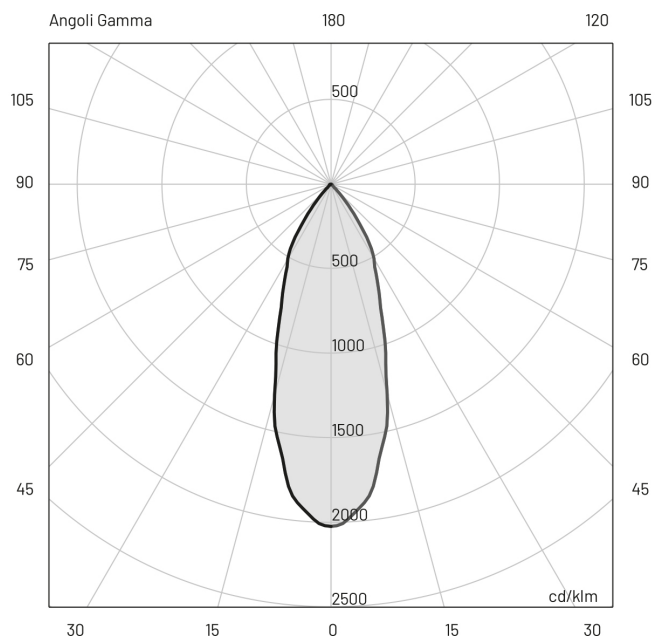

Photometry



Included accessories

- 2 m length cable H07RN-F
- Housing box

Available accessories

0404M003	Loop-in loop-out IP68	
0201001V0400	Non-slip glass	
0201001V0200	Sandblasted glass	
00KAV04	Set antivandalism screws	
0303CA3	Tool for antivandalism screws	