


Mira 45 | 2 W | Diffuse 180° | Floor recessed

Also available for wall recessed

Technical Specifications


| | |
|------------------------------|--|
| Source lamp | LED 2 W |
| Total wattage | 2 |
| Voltage | 24 Vdc |
| Control | Power supply not included (other controls on request) |
| Luminous flux (*Source flux) | 14 lm (160 lm*) @ 3000 K |
| Luminous efficacy | 7 lm/W @ 3000 K |
| Light Temperature | 3000 K |
| McADAM steps | 3 |
| Beam | Diffuse 180° |
| CRI | >90 |
| Life time | L80-B15 > 60.000 h Ta 40°C |
| IP rating | 67 |
| IK rating | 8 |
| Insulation class | III |
| Note | Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - RGBW |




Materials

| | |
|-----------|-----------------------------------|
| Body | Extruded aluminium EN AW6060 |
| Diffuser | Opal polycarbonate |
| Finishing | Graphite - Polyester powder paint |

Isolux

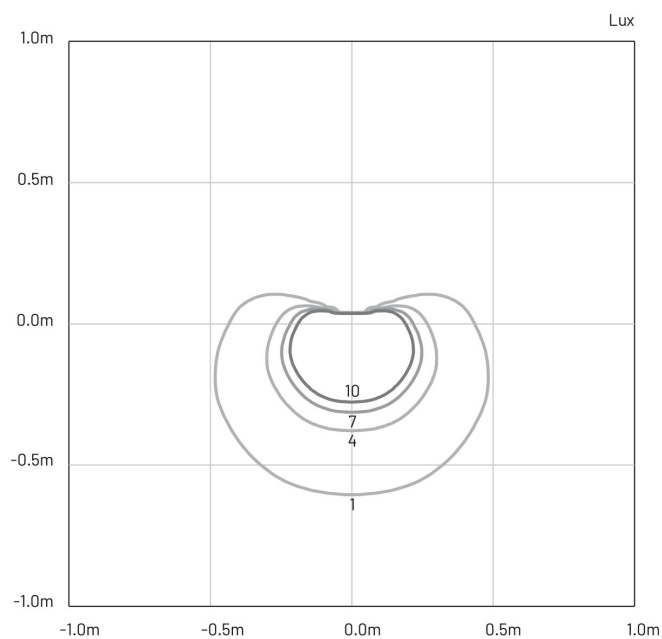



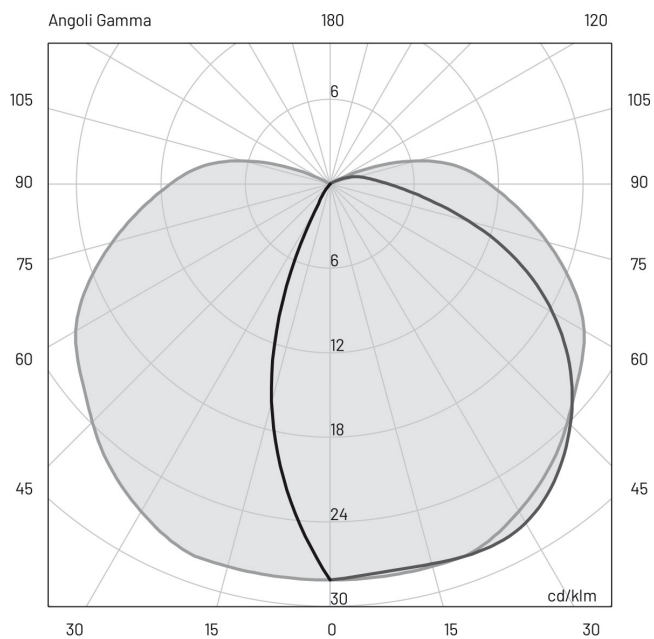

Photometry



Included accessories

- 1 m length cable -05RN-F
- Housing box

Available accessories

- | | | |
|------------------|--|---|
| 0404M009 | Single connection IP68 Only for floor recessed |  |
| 0409BT016 | Transformer _ 24 Vdc - 100 W Connect up to 30 devices |  |
| 0409BT014 | Transformer _ 24 Vdc - 12 W Connect up to 4 devices |  |
| 0409BT015 | Transformer _ 24 Vdc - 25 W Connect up to 8 devices |  |