


Mira 45 | 2 W | flood 35° | Floor recessed

Technical Specifications

all the technical specifications are related to one head only

Source lamp	LED 2 W
Total wattage	2
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	102 lm (160 lm*) @ 3000 K
Luminous efficacy	51 lm/W @ 3000 K
Light Temperature	3000 K
McADAM steps	3
Beam	flood 35°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	III




Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear tempered glass 6 mm
Finishing	Graphite - Polyester powder paint

E (lux)

H(m)	lux @ 3000 K	Ø(m)
1.00	233	0.6
2.00	58	1.3
3.00	26	1.9
4.00	15	2.5
5.00	9	3.1

Photometry

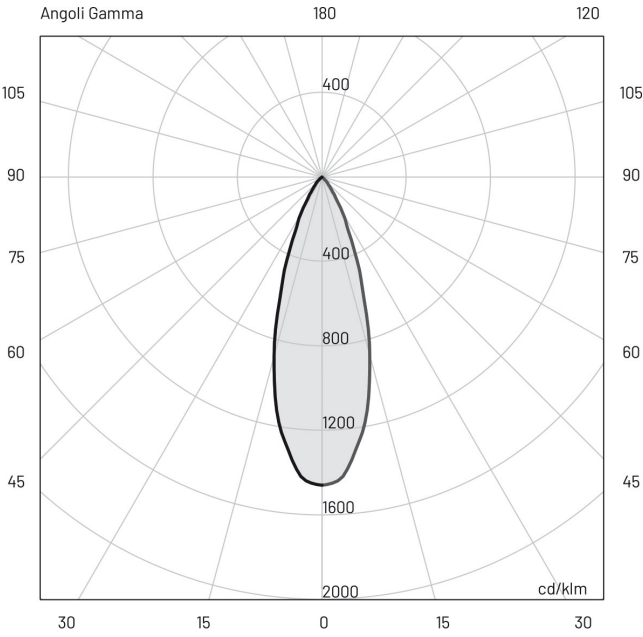

Included accessories

-	1 m length cable -05RN-F
-	Housing box

Available accessories

0404M009	Single connection IP68
0409BT016	Transformer _ 24 Vdc - 100 W Connect up to 30 devices
0409BT014	Transformer _ 24 Vdc - 12 W Connect up to 4 devices
0409BT015	Transformer _ 24 Vdc - 25 W Connect up to 8 devices