


Mira 45 LT | 2 W | elliptic 20° x 50° | Floor recessed

Also available for wall recessed

Technical Specifications

all the technical specifications are related to one head only

Source lamp	LED 2 W
Total wattage	2
Voltage	24 Vdc
Control	Power supply not included (other controls on request)
Luminous flux (*Source flux)	90 lm (160 lm*) @ 3000 K
Luminous efficacy	45 lm/W @ 3000 K
Light Temperature	2700 K
McADAM steps	3
Beam	elliptic 20° x 50°
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	III
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - RGBW




Materials

Body	Extruded aluminium EN AW6060
Diffuser	Extra clear polycarbonate
Finishing	Grey - Polyester powder paint

E (lux)

H(m)	lux @ 3000 K	Ø (m)
1.00	203	0.85
2.00	51	1.70
3.00	23	2.55
4.00	13	3.39
5.00	8	4.24

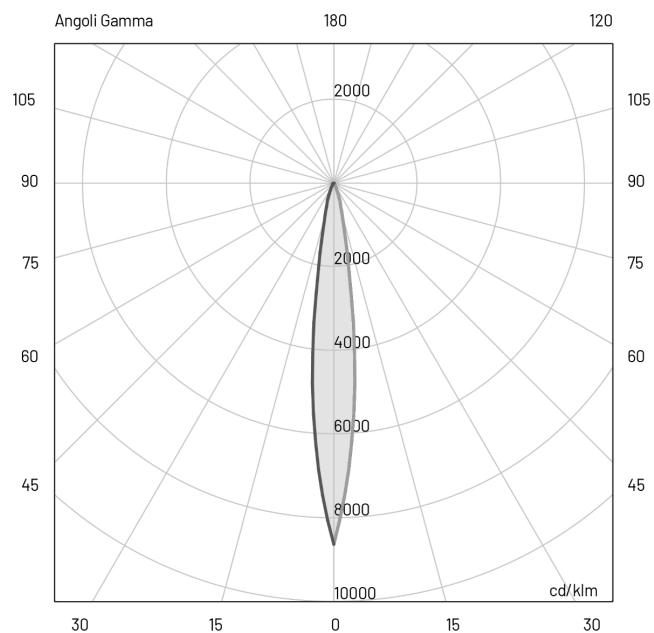


Photometry



Included accessories

-	1 m length cable -05RN-F
-	Housing box

Available accessories

0404M009	Single connection IP68 Only for floor recessed	
0409BT016	Transformer _ 24 Vdc - 100 W Connect up to 30 devices	
0409BT014	Transformer _ 24 Vdc - 12 W Connect up to 4 devices	
0409BT015	Transformer _ 24 Vdc - 25 W Connect up to 8 devices	