


Mira 65 | 5 W | Diffuse 180° | Floor recessed

Also available for wall recessed

Technical Specifications


Source lamp	LED 5 W
Total wattage	5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	33 lm (400 lm*) @ 3000 K
Luminous efficacy	6.5 lm/W @ 3000 K
Light Temperature	2700 K
McADAM steps	3
Beam	Diffuse 180°
CRI	>80
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	II
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light control on request: 2200K - 4000K - RGBW




Materials

Body	Extruded aluminium EN AW6060
Diffuser	Opal polycarbonate
Finishing	Graphite - Polyester powder paint

Isolux

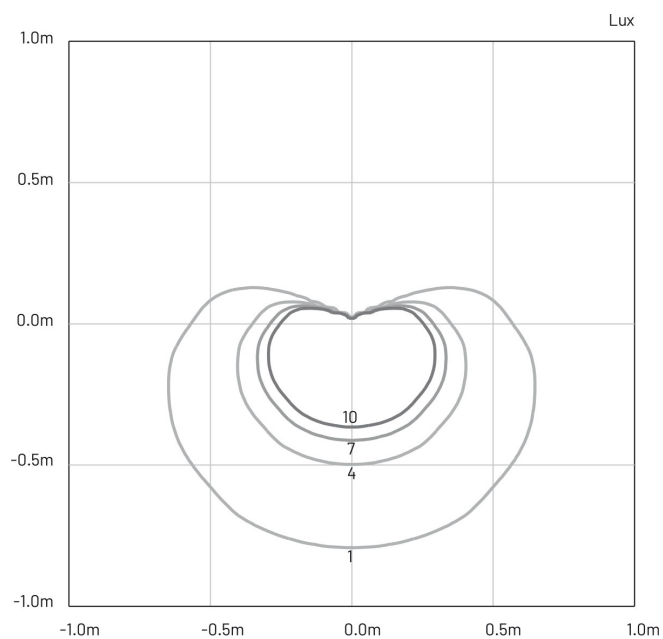

Photometry

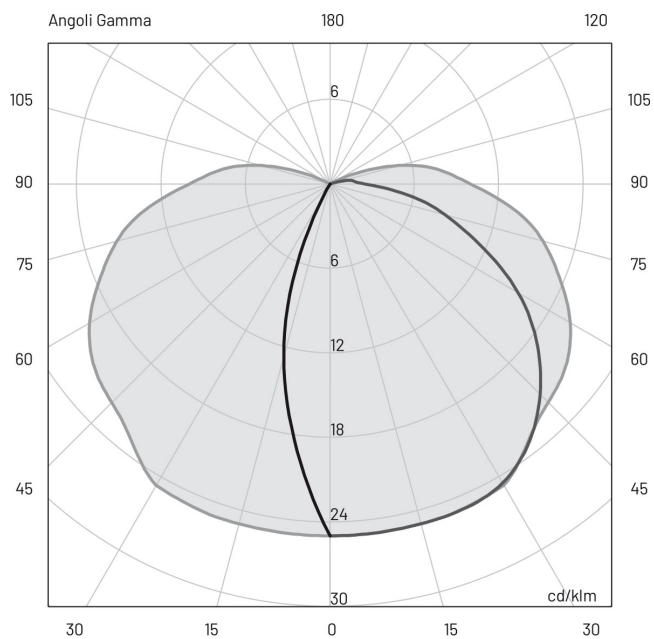

Included accessories

- 1 m length cable H05RN-F
- Housing box

Available accessories

- 0404M009 Single connection IP68

