


## Polos\_2 | 14 W | diffuse | Bollards

115 cm

### Technical Specifications


Source lamp	LED 14 W
Total wattage	16
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off (other controls on request)
Luminous flux (*Source flux)	680 lm (1560 lm*) @ 3000 K
Luminous efficacy	42.5 lm/W @ 3000 K
Light Temperature	4000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L80-B15 > 60.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I
Note	Control on request: DALI - 1/10V - DMX - TRIAC Light colour on request 2200 K - RGBW

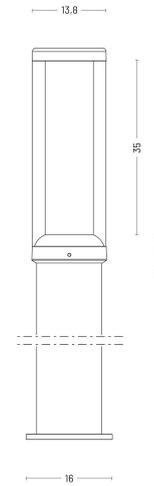


### Materials

Body	Die-cast aluminium EN47100 and extruded aluminium EN AW6060
Diffuser	Extra clear polycarbonate
Finishing	Grey - Polyester powder paint

## Isolux

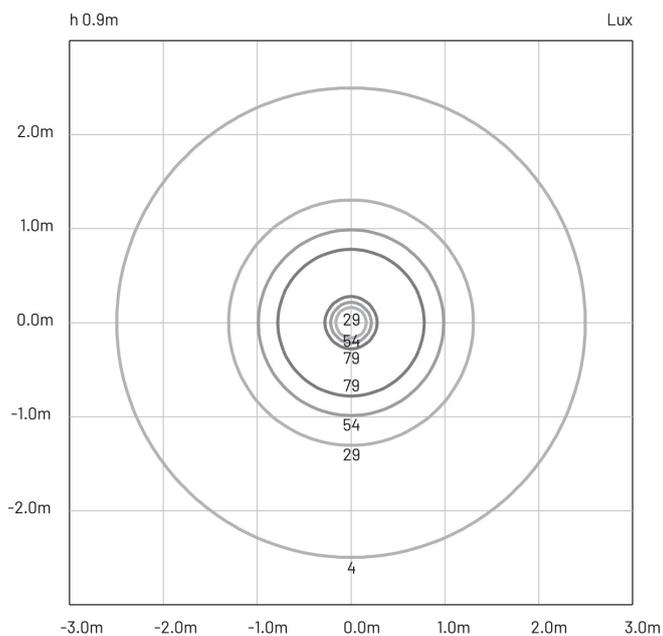

## Photometry

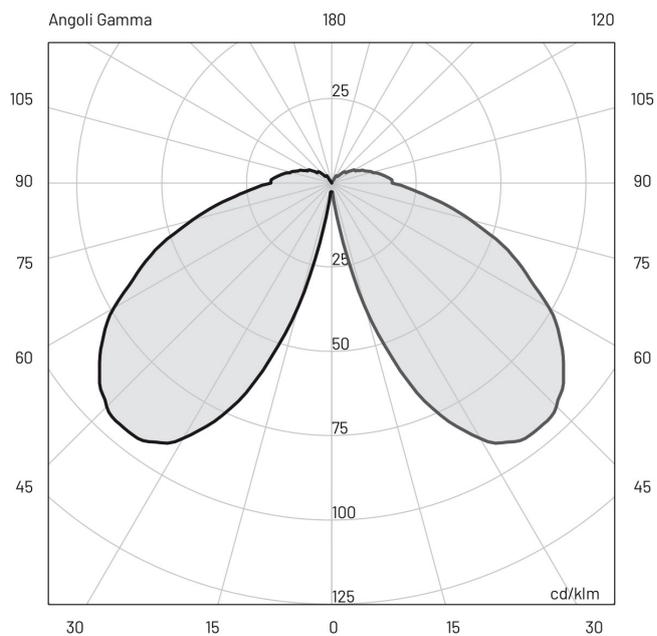

## Available accessories

00A405.01P

Anchor bolt



0404M003

Loop-in loop-out IP68



00A405

Root mounting kit

